

INDIANA LIMESTONE - STANDARD BUFF™

● LIMESTONE



HONED

DESCRIPTION

This traditional buff shade of Indiana Limestone ranges from a warm cream to light brown with muted veining and slight grain movement visible in the surface. Its fine to medium grain composition have made it a prized material for architectural ornamentation on iconic buildings across North America.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

18 400 m³ and more
(650 000 cu. ft.)

AVAILABLE FINISHES


Honed Sandblasted Bush-Hammered Wire Brushed Split Face Tumbled

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

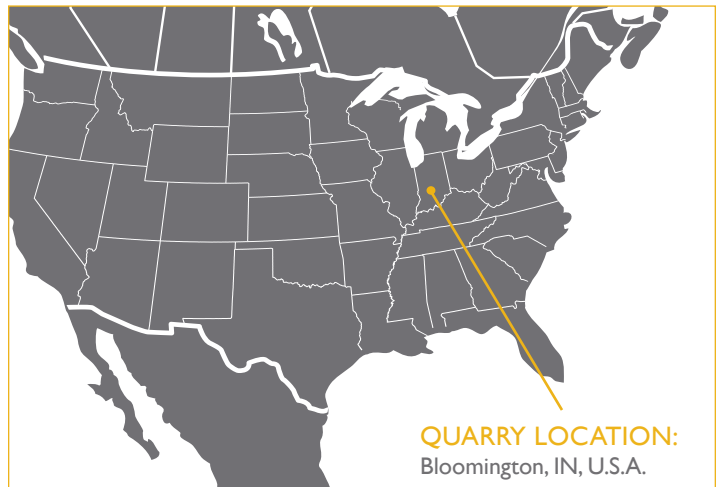

QUARRY LOCATION:
Bloomington, IN, U.S.A.

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**
ANSI/NSC 373 Certified Quarry since **2018**



POLYCOR

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.