

PRODUCT SHEETS




POLYCOR

GRANITE

AMERICAN BLACK®

GRANITE

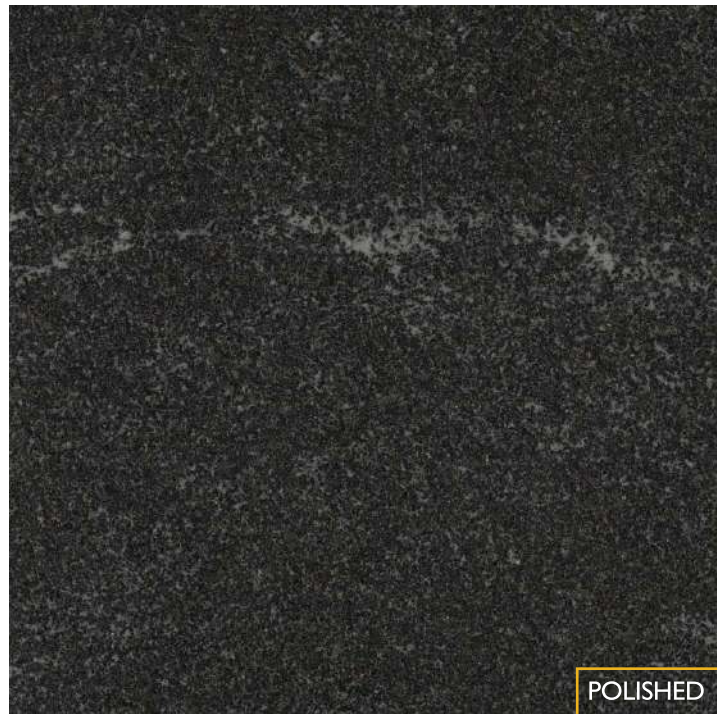

POLISHED

DESCRIPTION

This beautiful black granite with pronounced white veining has a marble-like quality in its vein pattern, with the durability of granite.

QUARRY OPERATING SINCE

1973

ANNUAL PRODUCTION

2 500 m³ and more
(88 287 cu. ft.)

FINISHES AVAILABLE


Polished	Waterjet
Antique	Propane flamed
Honed	Plasma flamed

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.023%	0.023%
Density	ASTM C97	192.3 lb/ft ³	3 080.35 kg/m ³
Compressive strength	ASTM C170	43 524 Psi	300.09 MPa
Flexural strength	ASTM C880	3 560 Psi	24.5 MPa
Modulus of rupture	ASTM C99	3 799 Psi	26.19 MPa



PROPANE FLAMED

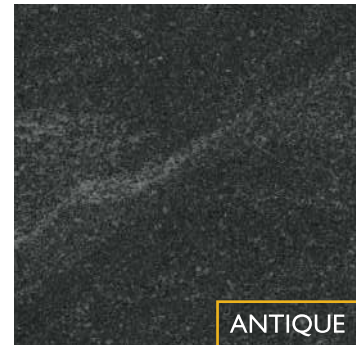

ANTIQUE

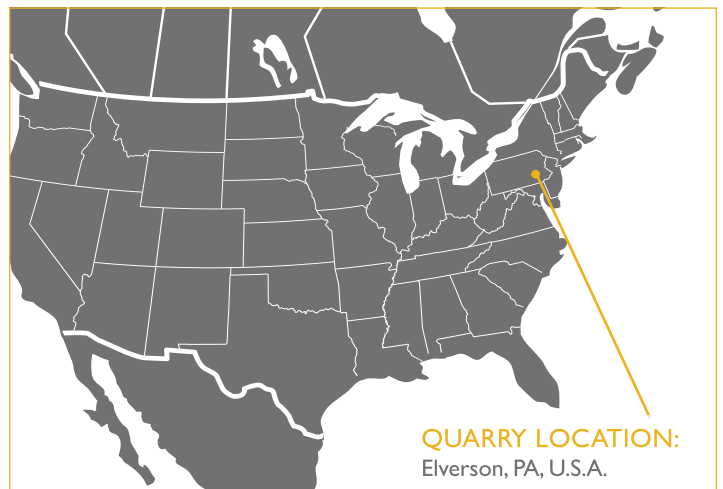

QUARRY LOCATION:
Elverson, PA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

AMERICAN MIST

GRANITE

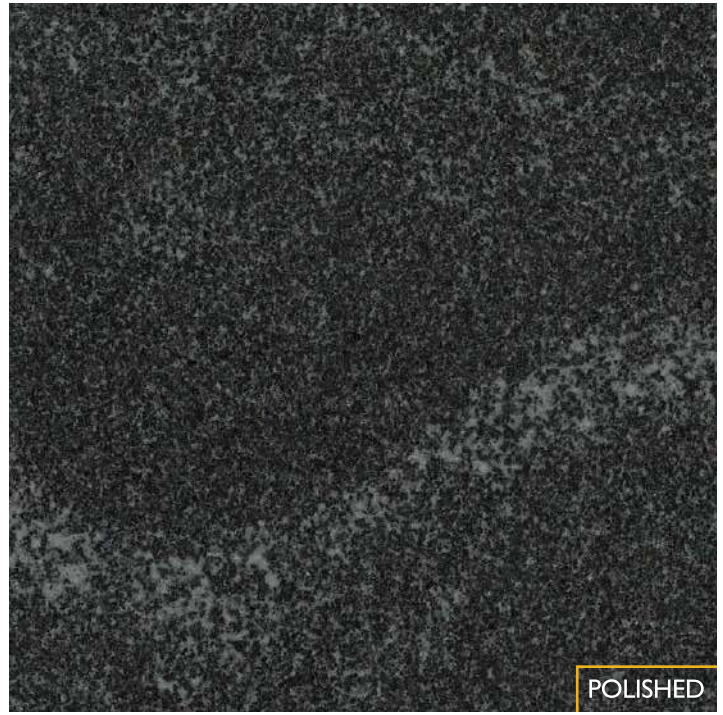

POLISHED

DESCRIPTION

This beautiful black granite with pronounced white veining is being utilized for smaller building projects when quality and durability are a must.

QUARRY OPERATING SINCE

1973

ANNUAL PRODUCTION

2 500 m³ and more
(88 287 cu. ft.)

FINISHES AVAILABLE


Polished	Waterjet
Antique	Propane flamed
Honed	Plasma flamed

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.023%	0.023%
Density	ASTM C97	192.3 lb/ft ³	3 080.35 kg/m ³
Compressive strength	ASTM C170	43 524 Psi	300.09 MPa
Modulus of rupture	ASTM C99	3 799 Psi	26.19 MPa



PROPANE FLAMED

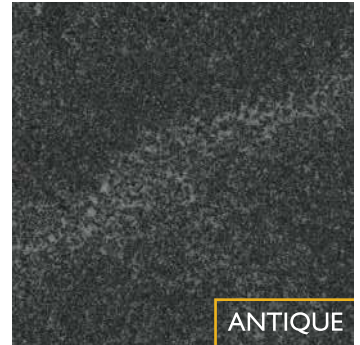

ANTIQUE

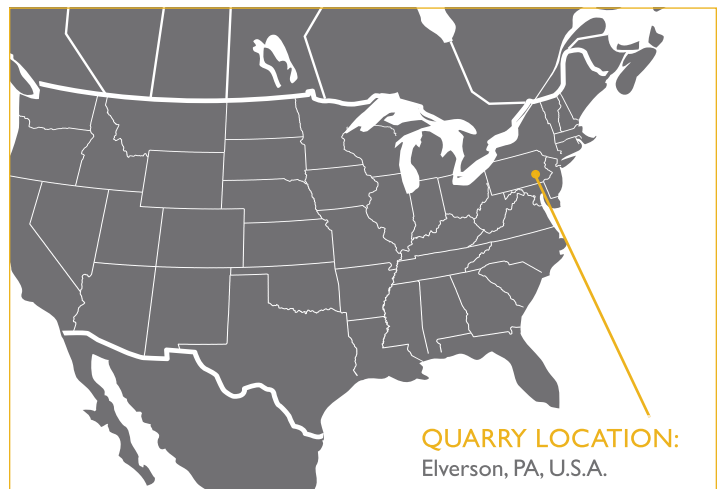

QUARRY LOCATION:
Elverson, PA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ASTRA

GRANITE

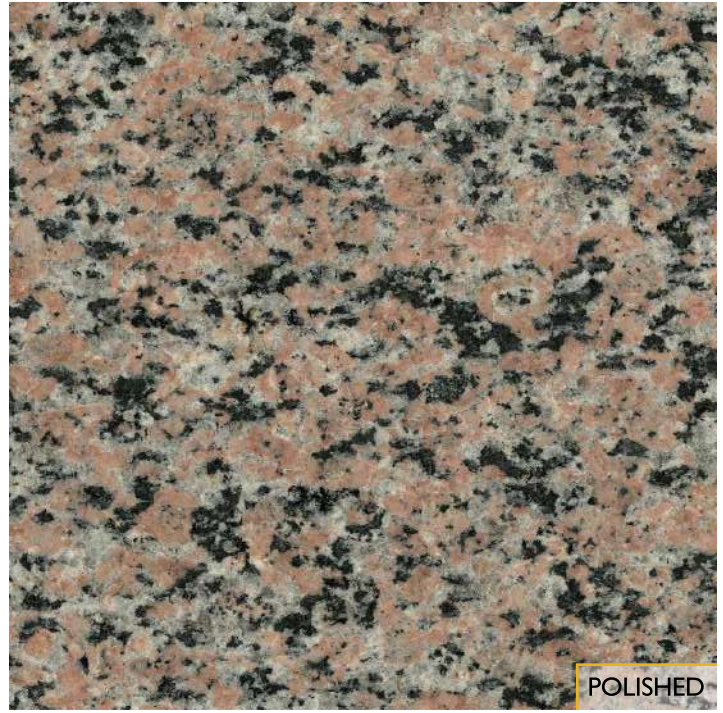

POLISHED

DESCRIPTION

Quarried in the heart of Quebec, this pink granite tinted with flakes of mica is known for its coarse and consistent grain structure. This is a Polycor exclusive.

QUARRY OPERATING SINCE 1990 | **ANNUAL PRODUCTION** 4 800 m³ and more (170 000 cu. ft.)

FINISHES AVAILABLE


- Polished
- Antique
- Honed
- Waterjet
- Propane flamed
- Plasma flamed

APPLICATIONS

- Exterior
- Interior
- Horizontal
- Vertical
- Commercial
- Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.15%	0.15%
Density	ASTM C97	166.35 lb/ft ³	2 664.67 kg/m ³
Compressive strength	ASTM C170	22 046 Psi	152.00 MPa
Modulus of rupture	ASTM C99	1 809 Psi	12.47 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Saint-Ludger-de-Milot, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

BARRE GRAY®

GRANITE



POLISHED

DESCRIPTION

Recognized around the world as the finest quality gray granite available, Barre Gray® is the ultimate long-lasting choice in any finish. Its unique proportions of quartz and feldspar make it unusually durable, moisture-resistant and thermally stable.

QUARRY OPERATING SINCE 1880 | **ANNUAL PRODUCTION** 9 000 m³ and more
(317 832 cu. ft.)

FINISHES AVAILABLE

Polished Sandblasted
Antique Propane flamed
Honed Plasma flamed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.210%	0.210%
Density	ASTM C97	165.7 lb/ft ³	2 654.26 kg/m ³
Compressive strength	ASTM C170	23 645 Psi	163.03 MPa
Flexural strength	ASTM C880	2 114 Psi	14.6 MPa
Modulus of rupture	ASTM C99	2 393 Psi	16.50 MPa



PROPANE FLAMED

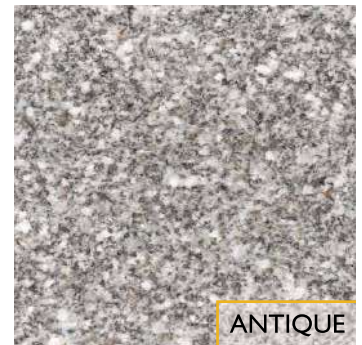

ANTIQUE

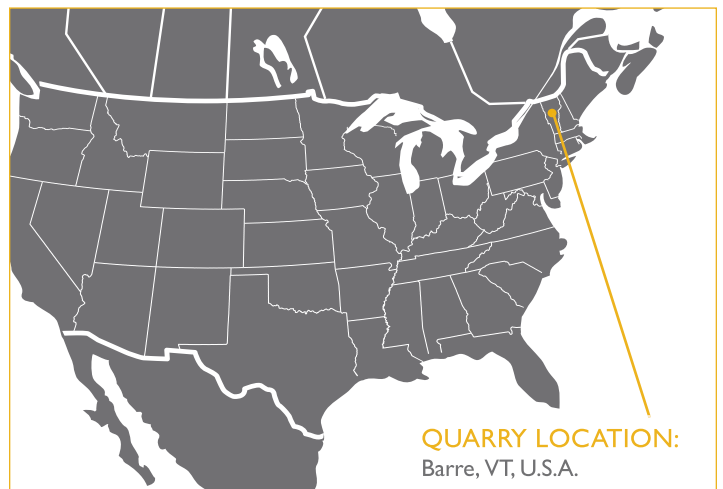

QUARRY LOCATION:
Barre, VT, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

BETHEL WHITE®

GRANITE



POLISHED

DESCRIPTION

Bethel White® displays a flawless, even grain and purity of color that truly makes it the most prized in the world. It's the gold standard that all other white granites must measure up to.

QUARRY OPERATING SINCE

1900

ANNUAL PRODUCTION

4 000 m³ and more
(141 259 cu. ft.)

FINISHES AVAILABLE

Polished Sandblasted
Waterjet Propane flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.256%	0.256%
Density	ASTM C97	164.4 lb/ft ³	2 633.44 kg/m ³
Compressive strength	ASTM C170	34 027 Psi	234.61 MPa
Flexural strength	ASTM C880	2 495 Psi	14.9 MPa
Modulus of rupture	ASTM C99	1 937 Psi	13.36 MPa



PROPANE FLAMED



SANDBLASTED

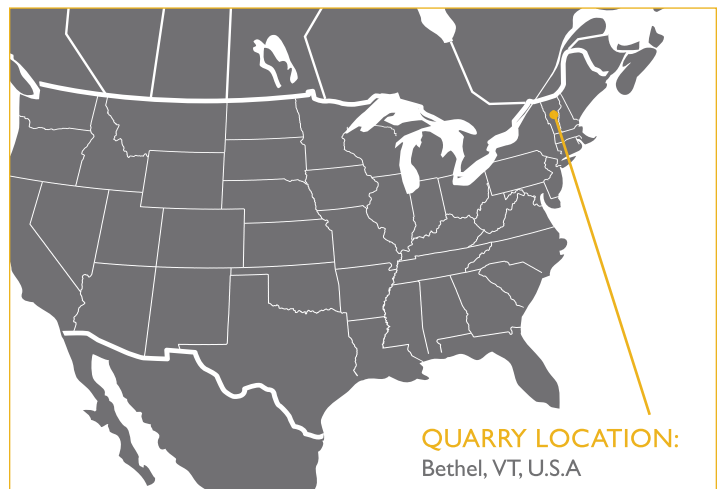

QUARRY LOCATION:
Bethel, VT, U.S.A

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CALEDONIA

GRANITE



POLISHED

DESCRIPTION

Caledonia is a 100% Quebec-made product and is a Canadian emblem. It is known for its color consistency, making it a good choice of granite for multistage projects.


Often sought for big projects, this granite is valued in Asia, primarily in Japan, China and Korea. It is also used in Quebec for curbs, thanks to its durability.

QUARRY OPERATING SINCE

1880

ANNUAL PRODUCTION

10 000 m³ and more
(350 000 cu. ft.)



PROPANE FLAMED



ANTIQUÉ

FINISHES AVAILABLE

Polished Flamed
Antique Waterjet

APPLICATIONS

Exterior Vertical Curbs
Interior Commercial Pavers
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.18%	0.18%
Density	ASTM C97	167.6 lb/ft ³	2 684.69 kg/m ³
Compressive strength	ASTM C170	24 426 Psi	1 68.41 MPa
Flexural strength	ASTM C880	1 392 Psi	9.6 MPa
Modulus of rupture	ASTM C99	1 703 Psi	11.74 MPa



QUARRY LOCATION:
Rivière-à-Pierre, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CAMBRIAN BLACK®

GRANITE



POLISHED

DESCRIPTION

A great Canadian classic, this timeless granite comes from a quarry that is exclusive to Polycor. It's also one of the few black granites that don't require any resin or dye, making it ideal for countless applications.

QUARRY OPERATING SINCE 1980 | **ANNUAL PRODUCTION** 5 000 m³ and more (180 000 cu. ft.)

FINISHES AVAILABLE

Antique	Flamed and washed	Waterjet
Honed	Polished	
Flamed	Sandblasted	

APPLICATIONS

Exterior	Vertical	Memorial
Interior	Commercial	
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.101%	0.101%
Density	ASTM C97	179 lb/ft ³	2 867.30 kg/m ³
Compressive strength	ASTM C170	22 122 Psi	152.53 MPa
Flexural strength	ASTM C880	2 927.9 Psi	20.2 MPa
Modulus of rupture	ASTM C99	1 868 Psi	12.88 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Saint-Nazaire, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CANADIAN RED

GRANITE

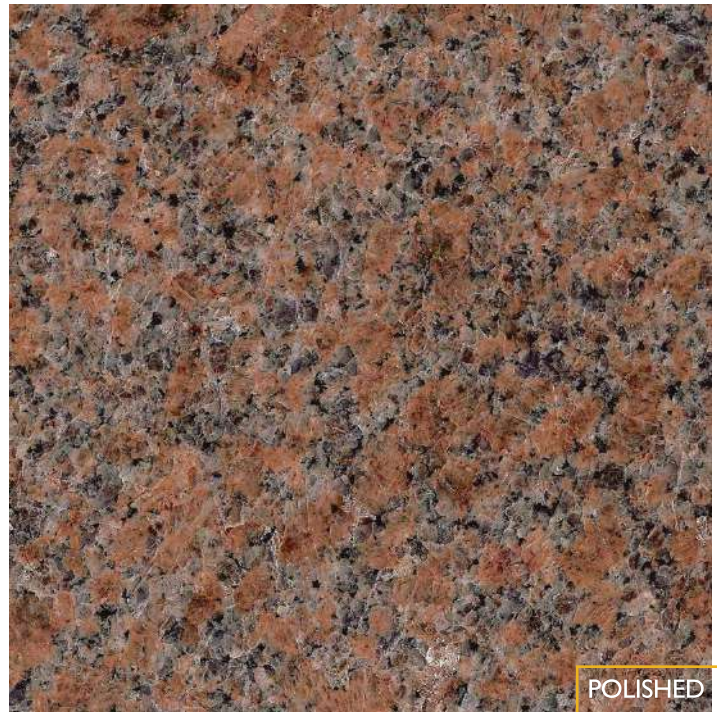

POLISHED

DESCRIPTION

This purplish-red granite is like no other on the market. It is used for monuments and construction projects.

Canadian Red keeps its distinctive color through the years and is highly-weather-resistant.

QUARRY OPERATING SINCE 1970 | **ANNUAL PRODUCTION** 1 800 m³ and more (65 000 cu. ft.)

FINISHES AVAILABLE

Antique	Flamed and washed	Waterjet
Honed	Polished	
Flamed	Sandblasted	

APPLICATIONS

Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.16%	0.16%
Density	ASTM C97	165 lb/ft ³	2 643.05 kg/m ³
Compressive strength	ASTM C170	26 390 Psi	181.95 MPa
Flexural strength	ASTM C880	1 610 Psi	11.1 MPa
Modulus of rupture	ASTM C99	1 681 Psi	11.59 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Winnipeg, MB, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CANADIAN VIOLETTA

GRANITE

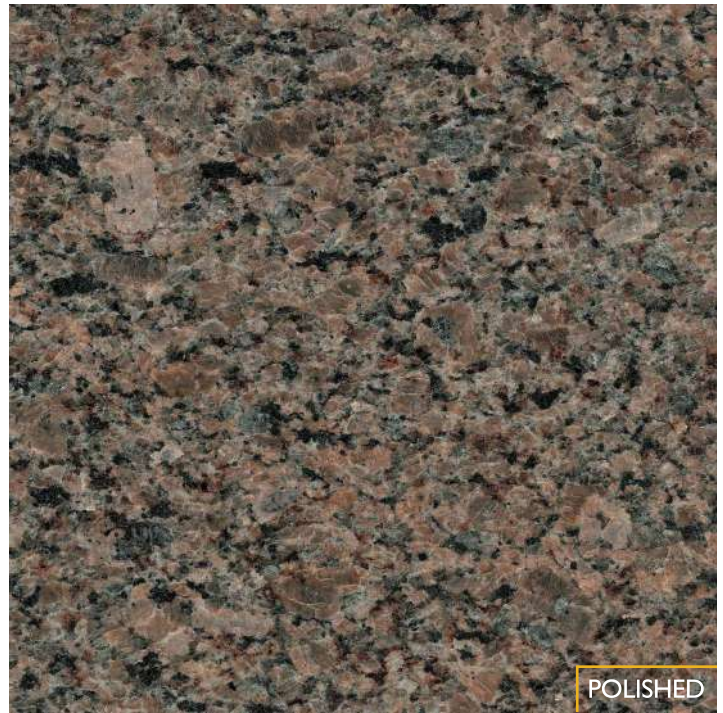

POLISHED

DESCRIPTION

A Canadian granite that is famed across North America, Canadian Violetta is known to be an excellent construction material: its pink hues are featured in many architectural projects.

A Polycor exclusive, this stone keeps its rich color, even in a thermal finish.

QUARRY OPERATING SINCE

1999

ANNUAL PRODUCTION

1 800 m³ and more
(65 000 cu. ft.)



PROPANE FLAMED



ANTIQUE

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.15%	0.15%
Density	ASTM C97	164.7 lb/ft ³	2 638.24 kg/m ³
Compressive strength	ASTM C170	26 265 Psi	181.09 MPa
Modulus of rupture	ASTM C99	2 146 Psi	14.80 MPa



QUARRY LOCATION:
Metabetchouan, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CONCORD GRAY

GRANITE



POLISHED

DESCRIPTION

Concord Gray granite is quarried in Concord, New Hampshire. This is a light gray granite, with small brown flecking, tight grain and consistent color.

QUARRY OPERATING SINCE

1883

ANNUAL PRODUCTION

11 000 m³ and more
(388 461 cu. ft.)

FINISHES AVAILABLE

Antique	Polished
Honed	Sandblasted
Flamed	Waterjet

APPLICATIONS

Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.274%	0.274%
Density	ASTM C97	N/A	N/A
Compressive strength	ASTM C170	21 982 Psi	151.56 MPa
Modulus of rupture	ASTM C99	2 633 Psi	18.15 MPa



PROPANE FLAMED



ANTIQUE

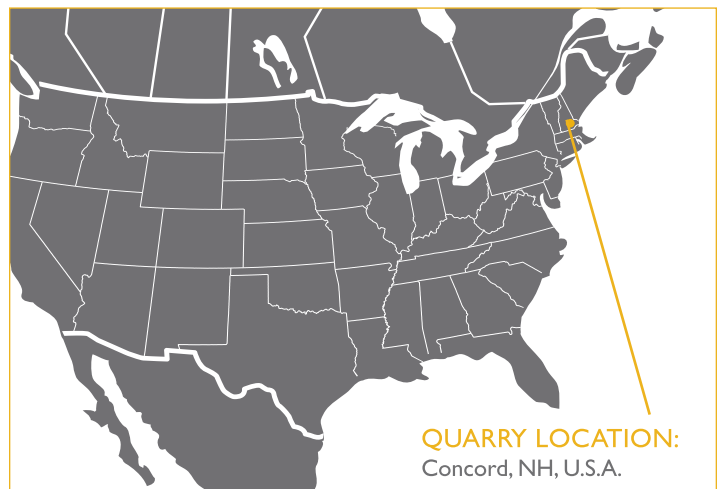

QUARRY LOCATION:
Concord, NH, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

GARDENIA WHITE®

GRANITE



POLISHED

DESCRIPTION

Gardenia White® is a stone of choice in the world market. Its beautiful white background with black veining makes any project stand out. It is also available in various price ranges to accommodate certain tastes and budgets.

QUARRY OPERATING SINCE

1995

ANNUAL PRODUCTION

2 500 m³ and more
(90 000 cu. ft.)

FINISHES AVAILABLE

Polished	Waterjet
Antique	Propane flamed
Honed	Plasma flamed



PROPANE FLAMED




ANTIQUE

APPLICATIONS

Interior	Commercial
Horizontal	Residential
Vertical	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.22%	0.22%
Density	ASTM C97	163.5 lb/ft ³	2 619.02 kg/m ³
Compressive strength	ASTM C170	41 459 Psi	285.85 MPa
Modulus of rupture	ASTM C99	1 606 Psi	11.07 MPa

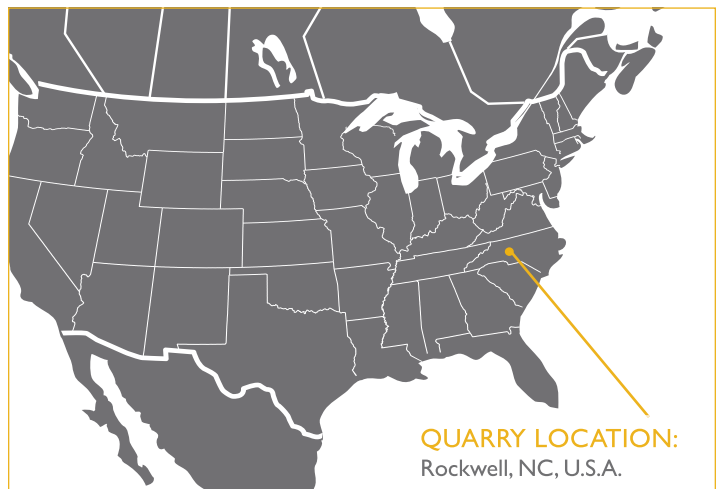

QUARRY LOCATION:
Rockwell, NC, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

JAY WHITE

GRANITE



POLISHED

DESCRIPTION

This clear and homogeneous granite can be easily controlled and can even become ultra white in a thermal finish.

Often used in architectural projects such as monuments and curbs in the United States because of its good structural properties and excellent durability.

QUARRY OPERATING SINCE

1912

ANNUAL PRODUCTION

On demand

FINISHES AVAILABLE

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS


Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.27%	0.27%
Density	ASTM C97	168 lb/ft ³	2 691.10 kg/m ³
Compressive strength	ASTM C170	27 700 Psi	190.98 MPa
Flexural strength	ASTM C880	2 020 Psi	13.9 MPa
Modulus of rupture	ASTM C99	2 244 Psi	15.47 MPa



PROPANE FLAMED

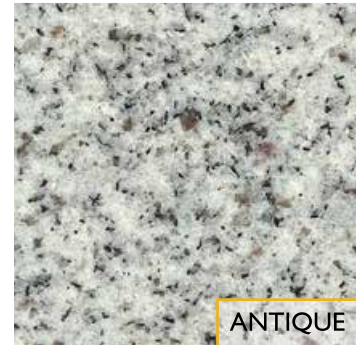

ANTIQUE



QUARRY LOCATION:
Jay, ME, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

KODIAK BROWN

GRANITE



POLISHED

DESCRIPTION

This granite is a treasure from the Canadian mountains. Often compared to Antique Brown, it's the ideal granite for countertops. Its deep brown and black hues lend warmth to any design.

QUARRY OPERATING SINCE

2002

ANNUAL PRODUCTION

900 m³ and more
(30 000 cu. ft.)

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.10%	0.10%
Density	ASTM C97	171 lb/ft ³	2 739.16 kg/m ³
Compressive strength	ASTM C170	25 525 Psi	175.99 MPa
Flexural strength	ASTM C880	1 813 Psi	12.5 MPa
Modulus of rupture	ASTM C99	2 248 Psi	15.50 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Chute-des-Passes, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

LAURENTIAN GREEN

GRANITE



POLISHED

DESCRIPTION

A Polycor exclusive granite, perfect for architectural projects because of its homogeneity, Laurentian Green remains a good choice for residential applications.

While similarly tinted stones may oxidize, this granite keeps its opaque dark-green color; flecked with blue quartz.

QUARRY OPERATING SINCE

| 1991 |

ANNUAL PRODUCTION

| 800 m³ and more
(65 000 cu. ft.)

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.12%	0.12%
Density	ASTM C97	177.9 lb/ft ³	2 849.68 kg/m ³
Compressive strength	ASTM C170	22 038 Psi	151.95 MPa
Flexural strength	ASTM C880	1 754 Psi	12.1 MPa
Modulus of rupture	ASTM C99	1 707 Psi	11.77 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Lac Morin, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

LAURENTIAN ROSE

GRANITE



POLISHED

DESCRIPTION

This exceptional granite has been carefully selected for its outstanding natural deep rose color and quality. The fine grain size of the Laurentian Rose allows it to be delicately carved and lettered with incredible contrast.

QUARRY OPERATING SINCE

1913

ANNUAL PRODUCTION

600 m³ and more
(21 000 cu. ft.)



PLASMA FLAMED



ANTIQUE

FINISHES AVAILABLE

Polished Honed
Antique Plasma flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.25%	0.25%
Density	ASTM C97	165 lb/ft ³	2 643.05 kg/m ³
Compressive strength	ASTM C170	32 053 Psi	221.00 MPa
Modulus of rupture	ASTM C99	N/A	N/A



QUARRY LOCATION:
Lac-Saguay, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

NEWTON BROWN

GRANITE

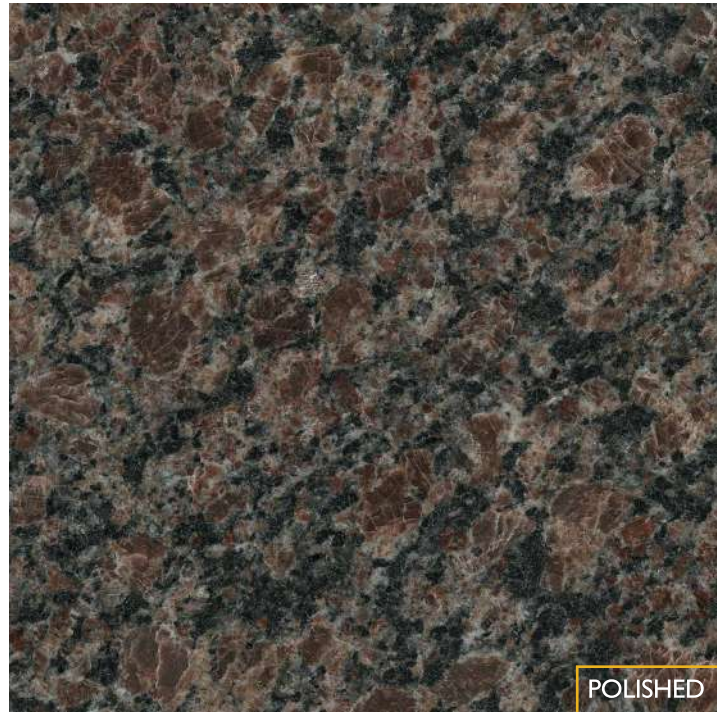

POLISHED

DESCRIPTION

This granite stands out from all others with its unique coarse brown grain: the richest color on the market.

The perfect stone for construction because of its grain size, its structural properties are valued in architectural projects.

QUARRY OPERATING SINCE

1980

ANNUAL PRODUCTION

1 000 m³ and more
(35 000 cu. ft.)

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.17%	0.17%
Density	ASTM C97	172 lb/ft ³	2 755.18 kg/m ³
Compressive strength	ASTM C170	26 990 Psi	186.09 MPa
Modulus of rupture	ASTM C99	2 040 Psi	14.07 MPa



PROPANE FLAMED

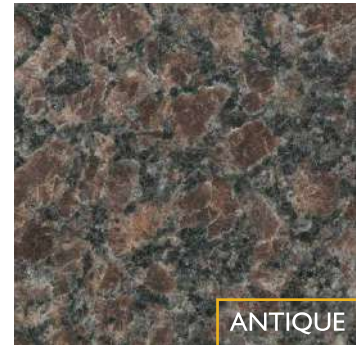

ANTIQUE



QUARRY LOCATION:
Saint-Alexis-des-Monts, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

NORDIC BLACK

GRANITE



POLISHED

DESCRIPTION

The tight metallic grain and large crystals of this granite make it the perfect choice for indoor applications such as countertops. Once polished, its thin white veins steal the spotlight.

QUARRY OPERATING SINCE

1990

ANNUAL PRODUCTION

1 800 m³ and more
(65 000 cu. ft.)

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed
Honed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.7 lb/ft ³	2 718.33 kg/m ³
Compressive strength	ASTM C170	20 870 Psi	143.89 MPa
Flexural strength	ASTM C880	1 340 Psi	9.2 MPa
Modulus of rupture	ASTM C99	2 001 Psi	13.80 MPa



PROPANE FLAMED

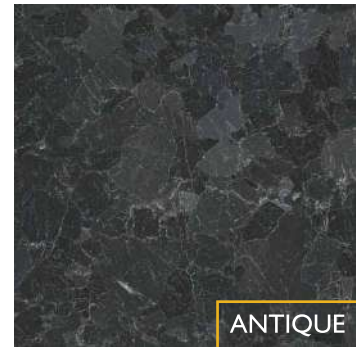

ANTIQUE



QUARRY LOCATION:
Rivière-Pentecôte, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

PICASSO

GRANITE



POLISHED

DESCRIPTION

With its neutral hues, this beautiful Canadian stone is a Polycor exclusive. Consistent and homogenous in color, it is easy to work this stone from every angle. It is recognizable for its neutral background color and thin orange surface veins.

No other stone like this is available on the market, and it is a customer favorite for architectural projects.

QUARRY OPERATING SINCE 2000 | **ANNUAL PRODUCTION** 3 600 m³ and more (127 000 cu. ft.)

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.16%	0.16%
Density	ASTM C97	165.2 lb/ft ³	2 646.25 kg/m ³
Compressive strength	ASTM C170	23 277 Psi	160.49 MPa
Flexural strength	ASTM C880	1 740 Psi	12.0 MPa
Modulus of rupture	ASTM C99	2 364 Psi	16.30 MPa



PROPANE FLAMED



ANTIQUE

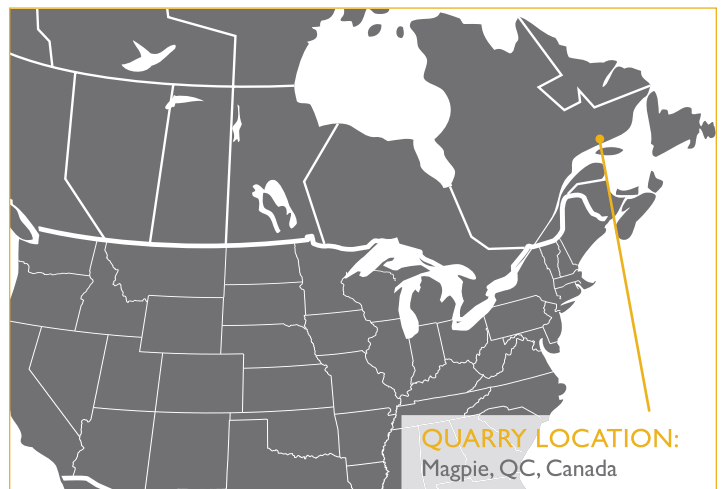

QUARRY LOCATION:
Magpie, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

POLYCHROME

GRANITE

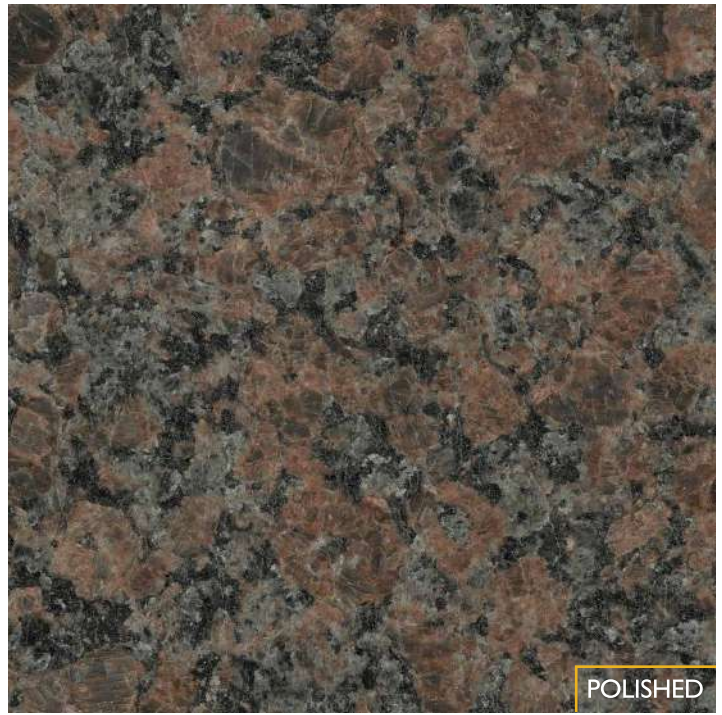

POLISHED

DESCRIPTION

This neutral granite's complexity, resistance and coarse mineral structure make it the choice of architects around the world for huge projects calling for consistency and large volumes.

QUARRY OPERATING SINCE

1968

ANNUAL PRODUCTION

3 000 m³ and more
(106 000 cu. ft.)

FINISHES AVAILABLE


Polished Waterjet
Antique Flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	168.9 lb/ft ³	2 705.52 kg/m ³
Compressive strength	ASTM C170	25 964 Psi	179.02 MPa
Flexural strength	ASTM C880	1 957 Psi	13.48 MPa
Modulus of rupture	ASTM C99	1 825 Psi	12.58 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
La Baie, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT HENRY BLACK

GRANITE



POLISHED

DESCRIPTION

This granite is also known as Taillon, Péribonka and Canadian Black. Metallic crystals assemble to create a contemporary work of art on a black, textured canvas.

QUARRY OPERATING SINCE

1970

ANNUAL PRODUCTION

On demand

FINISHES AVAILABLE

Polished Honed
Antique Flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.056%	0.056%
Density	ASTM C97	177.2 lb/ft ³	2 838.47 kg/m ³
Compressive strength	ASTM C170	22 242 Psi	153.36 MPa
Flexural strength	ASTM C880	1 769 Psi	12.2 MPa
Modulus of rupture	ASTM C99	1 929 Psi	13.30 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Saint-Henri-de-Taillon, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT SEBASTIEN

GRANITE



POLISHED

DESCRIPTION

Widely used for the construction of steps for churches and other important buildings, this granite is a heritage material in Quebec.


Its grains are small and uniform and it has good structural properties. Its warm gray and subtle beige color is unique among any other architectural granite on the market and makes it easy to pair with other stones.

QUARRY OPERATING SINCE

1997

ANNUAL PRODUCTION

1 200 m³ and more
(42 000 cu. ft.)



PROPANE FLAMED



ANTIQUE

FINISHES AVAILABLE

Polished Waterjet
Antique Flamed
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.27%	0.27%
Density	ASTM C97	163.8 lb/ft ³	2 623.82 kg/m ³
Compressive strength	ASTM C170	29 175 Psi	201.15 MPa
Flexural strength	ASTM C880	1 784 Psi	12.3 MPa
Modulus of rupture	ASTM C99	2 037 Psi	14.04 MPa



QUARRY LOCATION:
Saint-Sébastien, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SALISBURY PINK®

GRANITE



POLISHED

DESCRIPTION

Salisbury Pink® has grown to be the stone of choice for many projects throughout the world. Available in unlimited quantities, its unique pink shading and fine grain have placed it at the top of its class.

QUARRY OPERATING SINCE

1918

ANNUAL PRODUCTION

4 000 m³ and more
(141 259 cu. ft.)

FINISHES AVAILABLE

Polished	Waterjet
Antique	Propane flamed
Honed	Plasma flamed

APPLICATIONS

Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.159%	0.159%
Density	ASTM C97	163.4 lb/ft ³	2 617.42 kg/m ³
Compressive strength	ASTM C170	36 089 Psi	248.82 MPa
Modulus of rupture	ASTM C99	2 028 Psi	13.98 MPa



PROPANE FLAMED



ANTIQUE

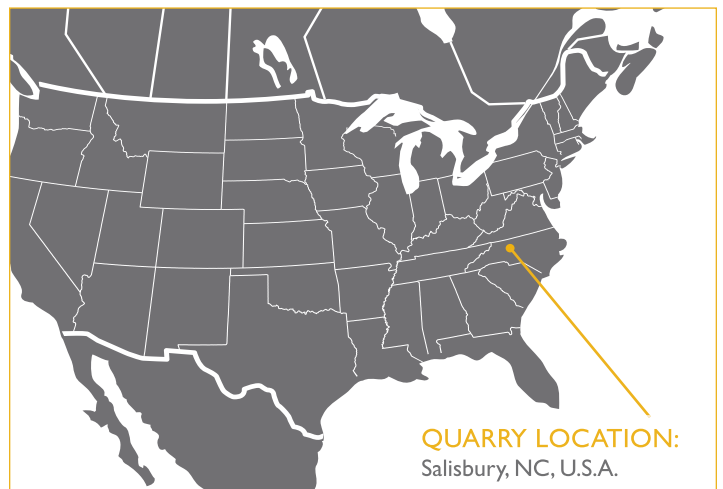

QUARRY LOCATION:
Salisbury, NC, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

STANSTEAD GREY®

GRANITE



POLISHED

DESCRIPTION

Stanstead Grey® granite is quarried in Stanstead, Quebec. This is a light to medium gray granite, with a medium and coarse grain. This granite is highly consistent in color:

QUARRY OPERATING SINCE

1920

ANNUAL PRODUCTION

7 000 m³ and more
(250 000 cu. ft.)

FINISHES AVAILABLE

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	



PROPANE FLAMED




ANTIQUE

APPLICATIONS

Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.18%	0.18%
Density	ASTM C97	166.9 lb/ft ³	2 659.06 kg/m ³
Compressive strength	ASTM C170	24 955 Psi	172.05 MPa
Flexural strength	ASTM C880	2 257 Psi	15.55 MPa
Modulus of rupture	ASTM C99	2 205 Psi	15.20 Mpa

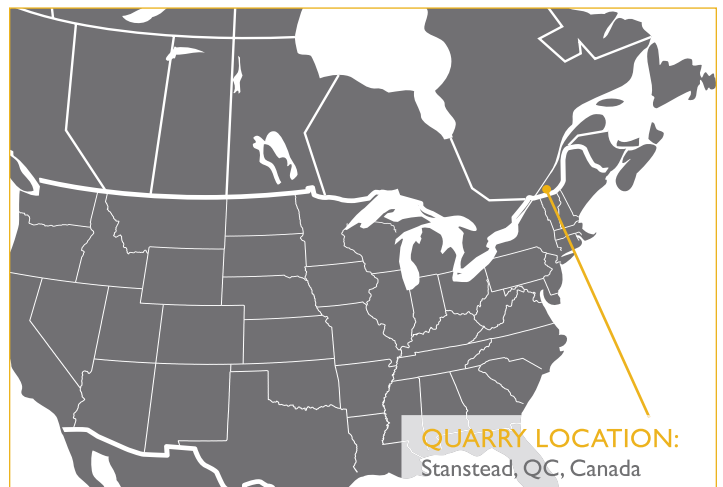

QUARRY LOCATION:
Stanstead, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

TITANIUM PEARL

GRANITE



POLISHED

DESCRIPTION

Quarried exclusively by Polycor; the primary color of this tight-grained granite is extremely stable. Its blue-gray hues and neutral tonality, similar to concrete, make it a popular choice in urban landscaping projects.

QUARRY OPERATING SINCE 2010 | **ANNUAL PRODUCTION** On demand

FINISHES AVAILABLE


Polished | Waterjet
Antique | Flamed

APPLICATIONS

Exterior | Vertical
Interior | Commercial
Horizontal | Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.12%	0.12%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	26 004 Psi	179.29 MPa
Flexural strength	ASTM C880	1 624.3 Psi	11.2 MPa
Modulus of rupture	ASTM C99	1 769 Psi	12.20 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Rivière-à-Pierre, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

WINNEWAY

GRANITE



DESCRIPTION

Strong and multi-purpose, this tight-grained pink stone comes from faraway Abitibi, and suits indoor and outdoor applications as well as architectural and monument projects.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1982

| 200 m³ and more
(42 000 cu.ft)

FINISHES AVAILABLE

Polished Waterjet
Antique Plasma flamed
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.18%	0.18%
Density	ASTM C97	163.73 lb/ft ³	2 622.70 kg/m ³
Compressive strength	ASTM C170	27 847 Psi	192.00 MPa
Modulus of rupture	ASTM C99	1 597 Psi	11.01 MPa



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

WOODBURY GRAY

GRANITE



POLISHED

DESCRIPTION

Woodbury Gray granite is quarried in Woodbury, Vermont. This is a salt and pepper, light gray granite, with a medium tight grain and a consistent color.

QUARRY OPERATING SINCE

1883

ANNUAL PRODUCTION

12 500 m³ and more
(441 433 cu. ft.)

FINISHES AVAILABLE

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	



PROPANE FLAMED




ANTIQUE

APPLICATIONS

Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.252%	0.252%
Density	ASTM C97	N/A	N/A
Compressive strength	ASTM C170	17 007 Psi	117.26 MPa
Flexural strength	ASTM C880	1 374 Psi	9.5 MPa
Modulus of rupture	ASTM C99	1 617 Psi	11.15 MPa

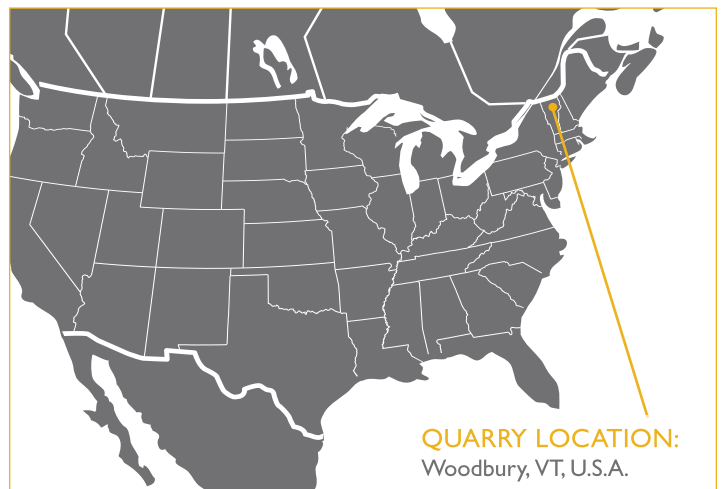

QUARRY LOCATION:
Woodbury, VT, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

LIMESTONE

CHARMOT

● LIMESTONE



DESCRIPTION

A warm, earth-toned limestone with a light beige background, medium grain and occasional shell inclusions. Consistent grain distribution stippled evenly across the surface lends a subdued visual texture that's versatile in any design aesthetic.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1893

2 250 m³ and more
(78 750 cu. ft.)

FINISHES AVAILABLE


Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	4.58%	4.58%
Density	ASTM C97	147 lb/ft ³	2 359 kg/m ³
Compressive strength	ASTM C170	10 594 Psi	73.0 MPa
Modulus of rupture	ASTM C99	1 095 Psi	7.55 MPa

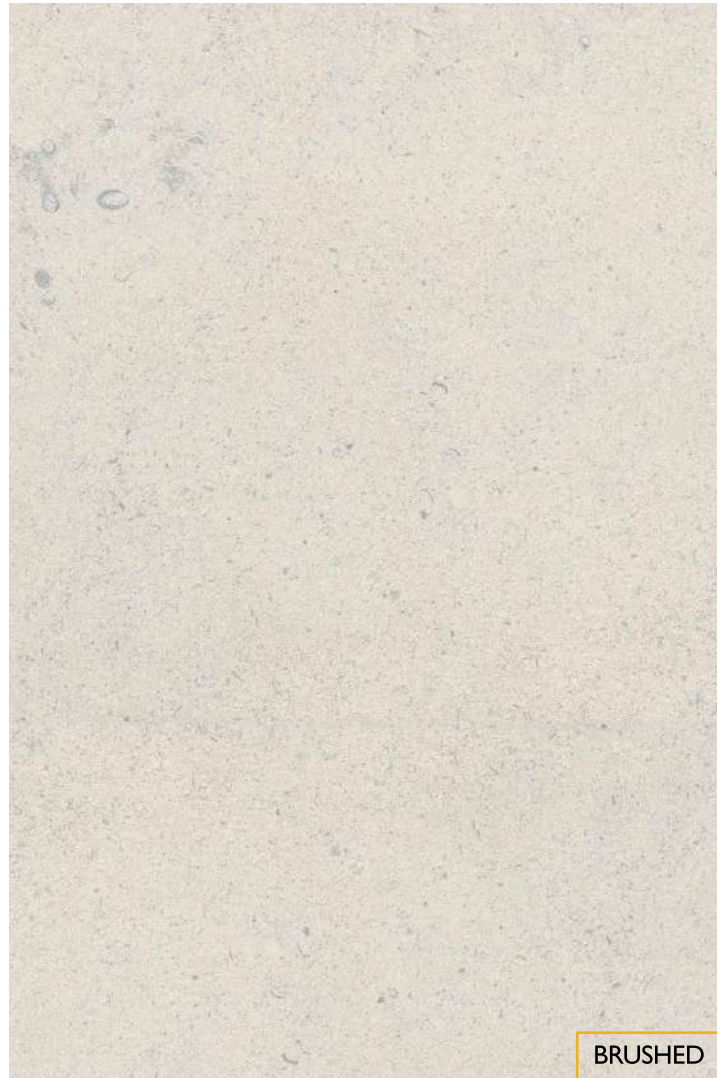

BRUSHED

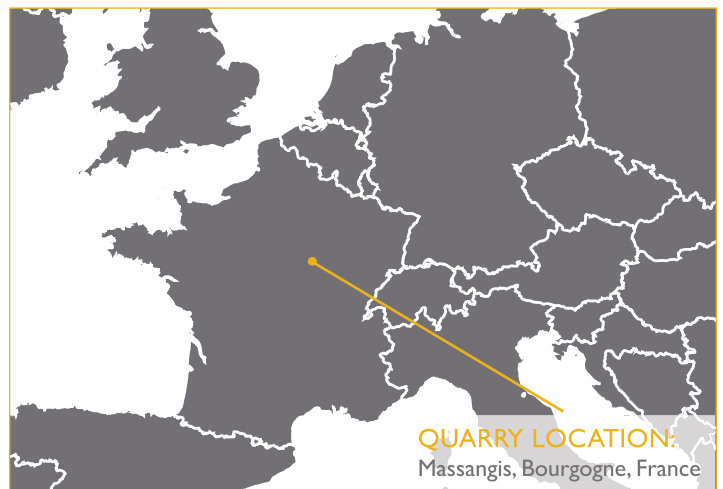

QUARRY LOCATION:
Massangis, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

CHASSAGNE BEAUHARNAIS

● LIMESTONE



DESCRIPTION

Earthy beige tones mixed with occasional dashes of light blush hues define this limestone's background. Sporadic crystalline veins and shell fossils add the slightest accent to any project's design aesthetic.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

Beginning of 20th century | On demand

FINISHES AVAILABLE

Brushed Iron Blasted Tumbled
Honed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	1.87%	1.87%
Density	ASTM C97	159 lb/ft ³	2 547 kg/m ³
Compressive strength	ASTM C170	22 497 Psi	155 MPa
Modulus of rupture	ASTM C99	1 669 Psi	11.5 MPa



HONED

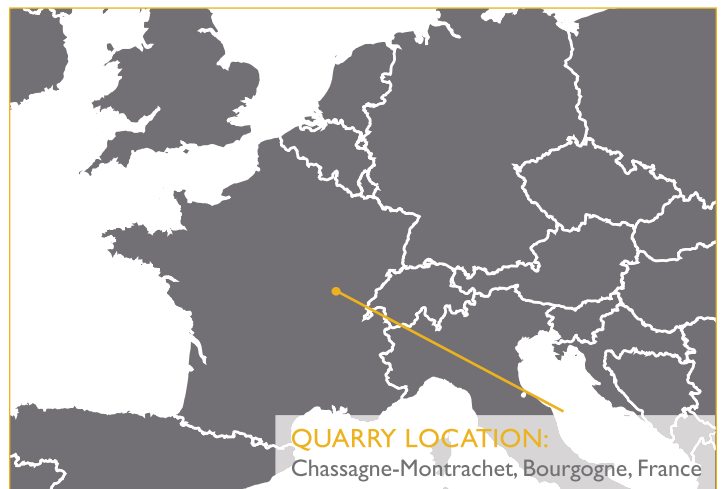

QUARRY LOCATION:
Chassagne-Montrachet, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

COMBLANCHIEN CLAIR

● LIMESTONE



DESCRIPTION

The dense, compact grain structure of this limestone gives it a marble-like quality in its appearance. A uniform, rosy beige background provides a neutral base for occasional small shell inclusions. A resilient and versatile choice for any interior or exterior application.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1893 | 700 m³ and more
(24 500 cu. ft.)

FINISHES AVAILABLE



Polished Iron Blasted Tumbled
Honed Bush-Hammered Flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.40%	0.40%
Density	ASTM C97	166.87 lb/ft ³	2 673.1 kg/m ³
Compressive strength	ASTM C170	24 275 Psi	167.37 MPa
Flexural strength	ASTM C880	1 661 Psi	11.46 MPa
Modulus of rupture	ASTM C99	2 310 Psi	15.92 MPa

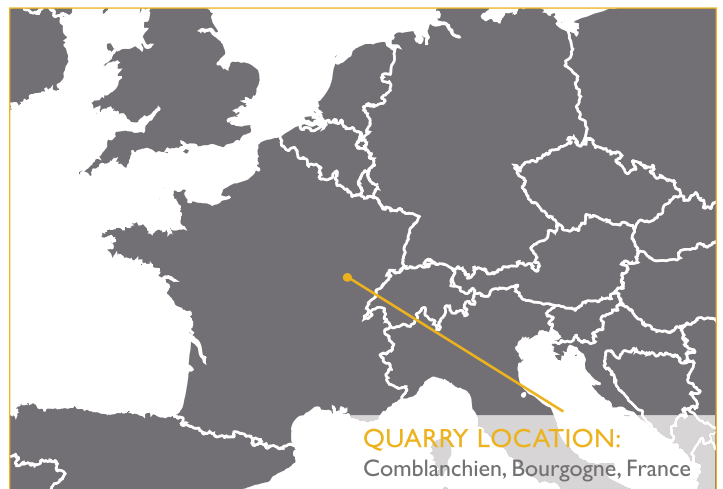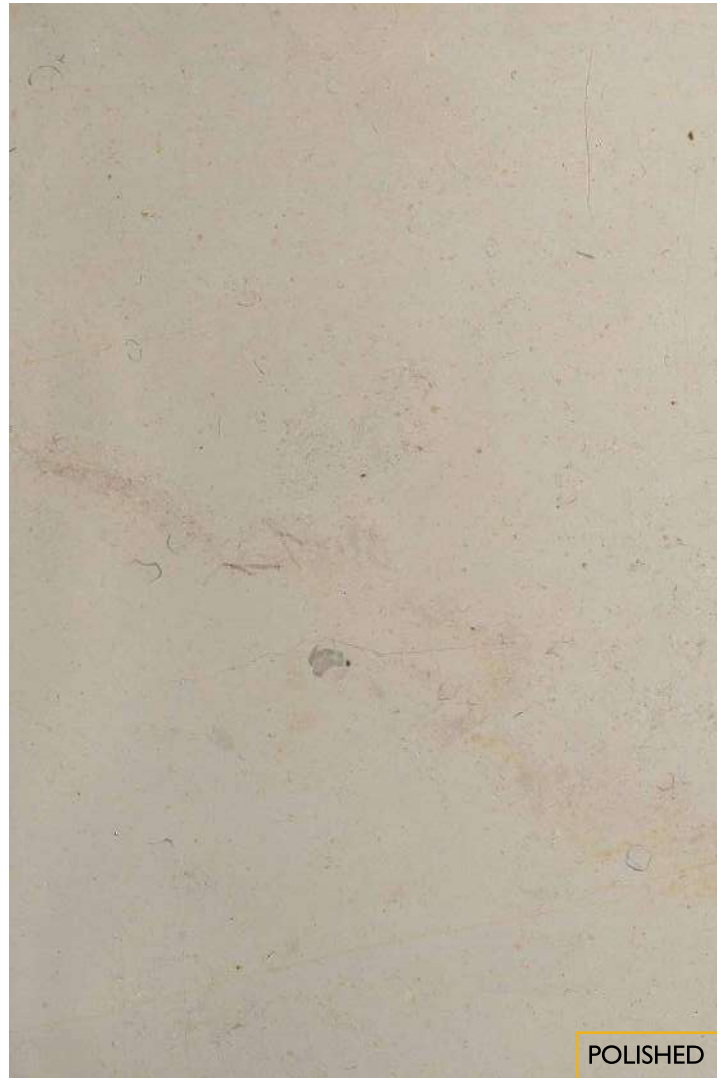

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE FULL COLOR BLEND

● LIMESTONE



DESCRIPTION

A natural, full range compilation of warm buff colors and medium gray tones are present within this historic limestone. Subtle veining meanders throughout the surface creating a unique movement in this medium grained, standard grade stone.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1897

12 000 m³ and more
(423 776 cu. ft.)

FINISHES AVAILABLE*

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa



HONED

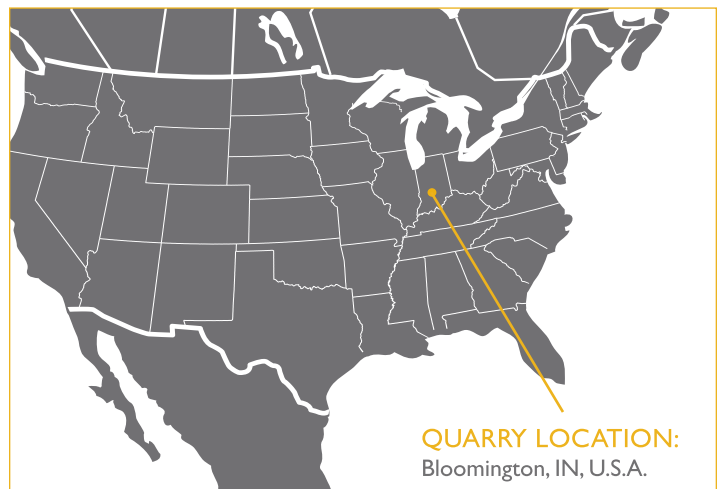

QUARRY LOCATION:
Bloomington, IN, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

INDIANA LIMESTONE RUSTIC BUFF

● LIMESTONE



DESCRIPTION

This traditional buff colored limestone ranges in hue from warm cream to light brown, all with a visible vein movement throughout the surface. The medium to coarse grained composition exhibits unique inclusions for a variegated appearance.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1897 | 6 000 m³ and more
(211 888 cu. ft.)

FINISHES AVAILABLE*


Honed | Bush-Hammered | Split Face
Sandblasted | Wire Brushed | Tumbled

APPLICATIONS


Exterior | Vertical
Interior | Commercial
Horizontal | Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

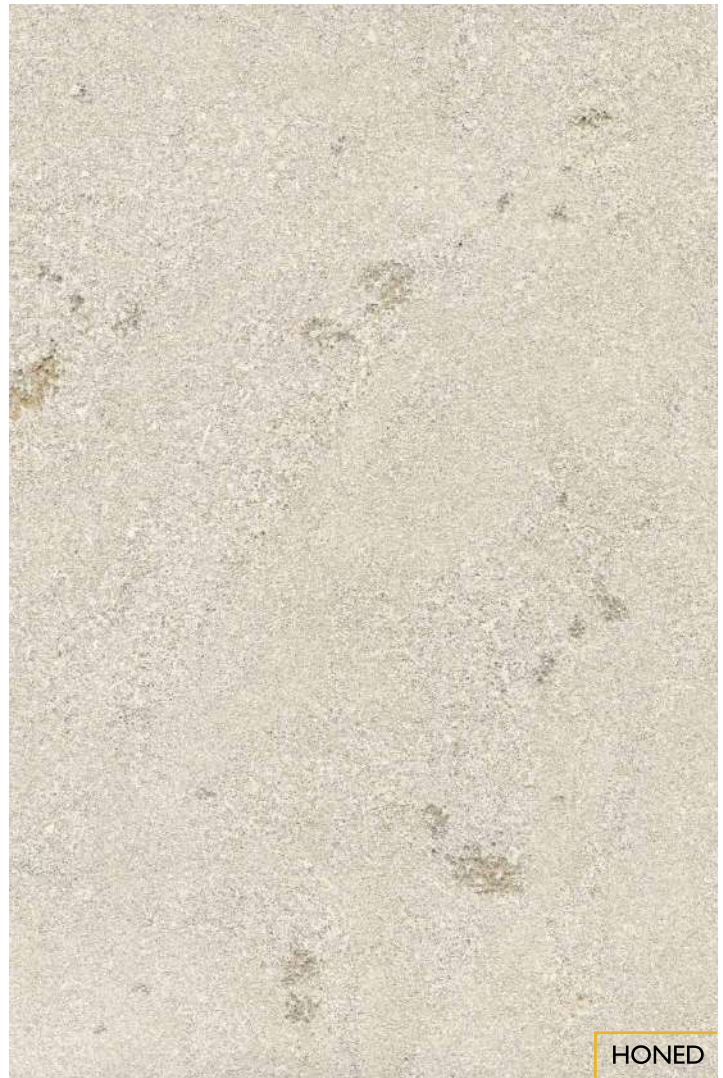

HONED

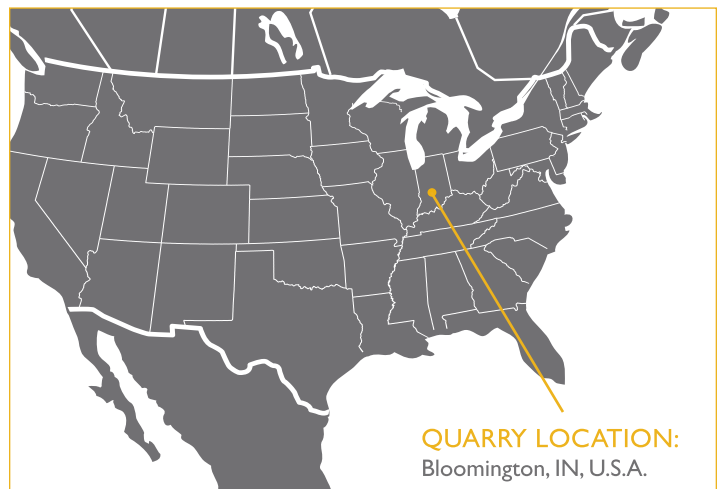

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

INDIANA LIMESTONE RUSTIC GRAY

● LIMESTONE



DESCRIPTION

A medium to large grained limestone keeping within a gray tonal range of light to medium gray shades that exhibits unique features and fossilized inclusions for a neutral, subtly veined, and rustic aesthetic.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

2 000 m³ and more
(70 629 cu. ft.)

FINISHES AVAILABLE*

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa



HONED

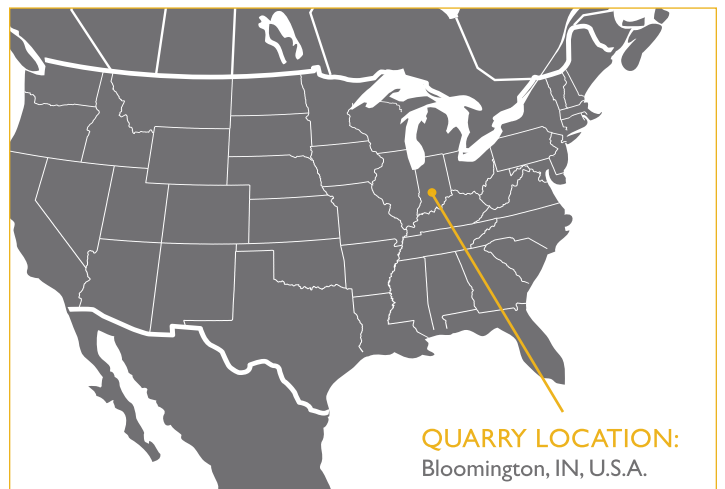

QUARRY LOCATION:
Bloomington, IN, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

INDIANA LIMESTONE STANDARD BUFF

● LIMESTONE



DESCRIPTION

This traditional buff shade of Indiana Limestone ranges from a warm cream to light brown with muted veining and slight grain movement visible in the surface. Its fine to medium grain composition have made it a prized material for architectural ornamentation on iconic buildings across North America.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1897

18 400 m³ and more
(650 000 cu. ft.)

FINISHES AVAILABLE*


Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

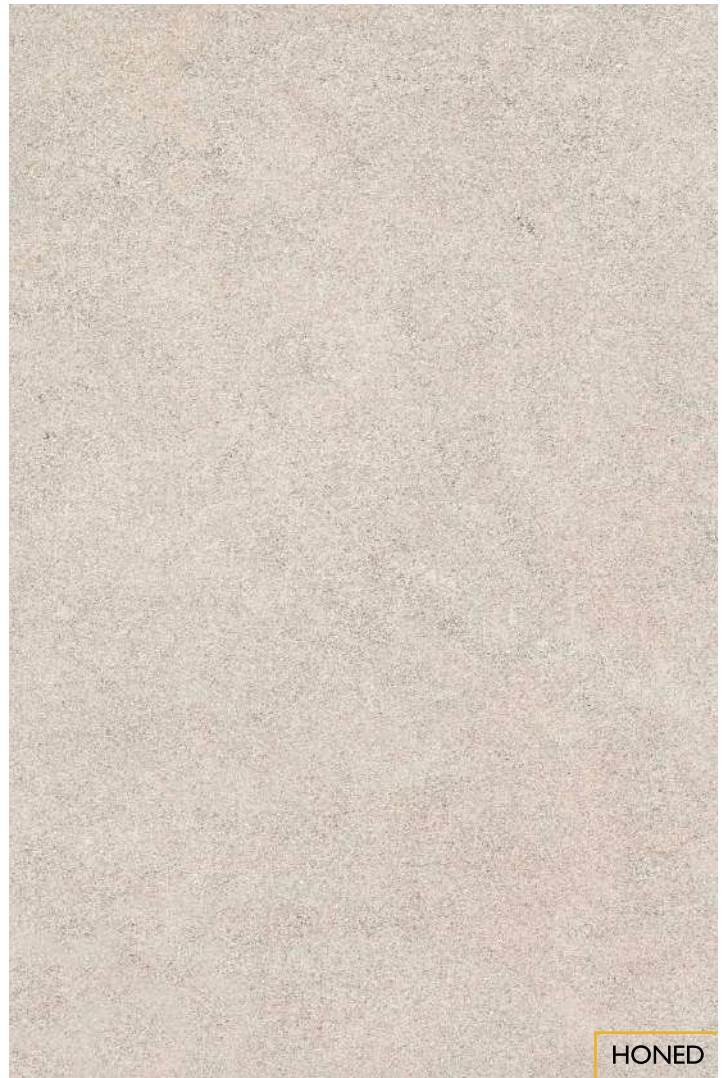

HONED

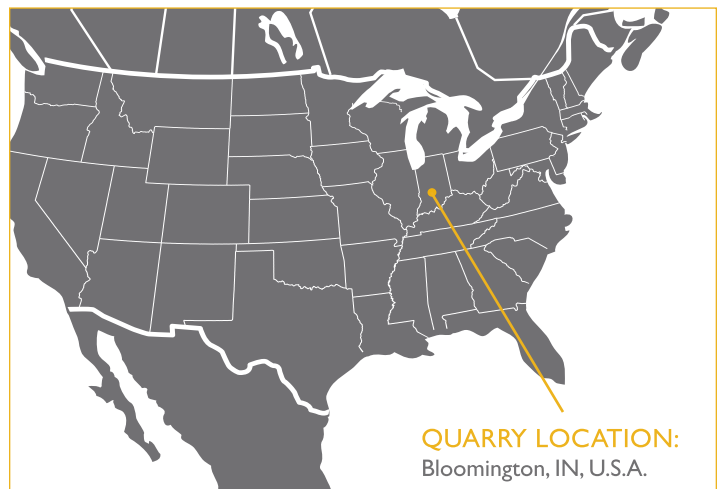

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

INDIANA LIMESTONE STANDARD GRAY

● LIMESTONE



DESCRIPTION

This neutral limestone possesses a subdued palette featuring light to medium shades of gray. A restrained, underlying vein pattern and subtle grain movement are visible in the fine to medium grained surface.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1897 | 12 000 m³ and more
(423 776 cu. ft.)

FINISHES AVAILABLE*

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa



HONED

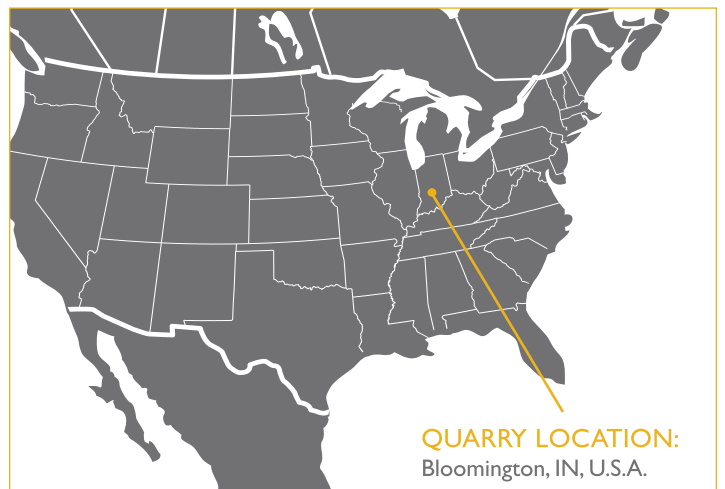

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

INDIANA LIMESTONE STANDARD SILVER BUFF

● LIMESTONE



DESCRIPTION

A neutral, cool gray buff limestone featuring subtle silver colored veining in the foreground and a fine to medium grained mineral structure.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

6 000 m³ and more
(211 888 cu. ft.)

FINISHES AVAILABLE*


Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

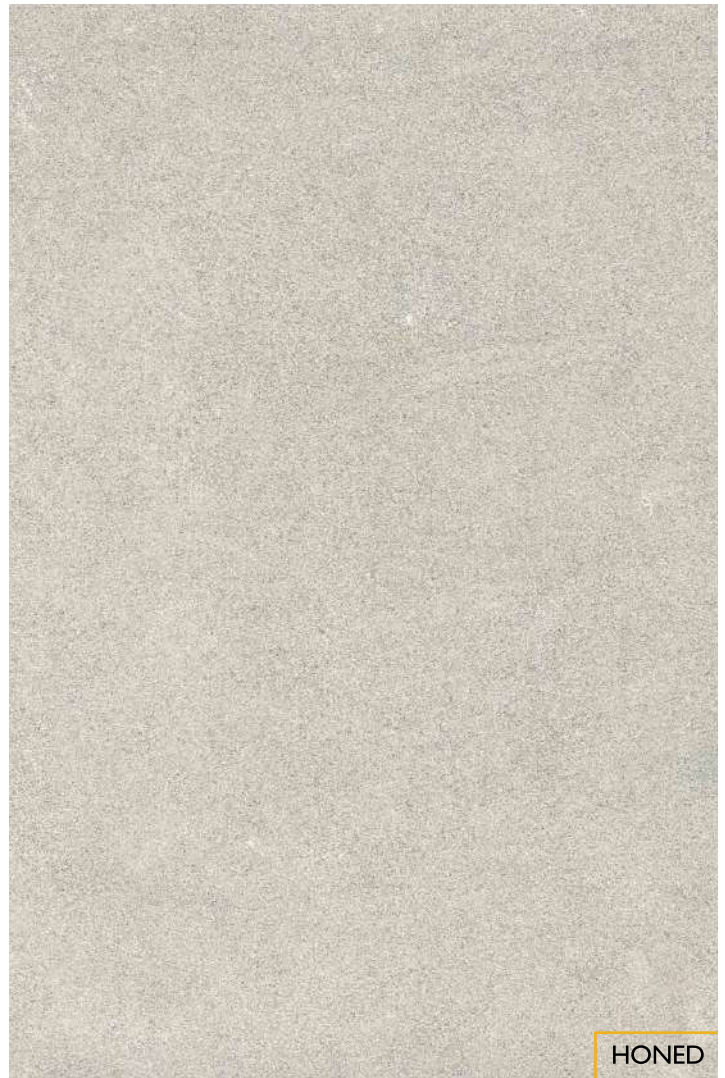

HONED

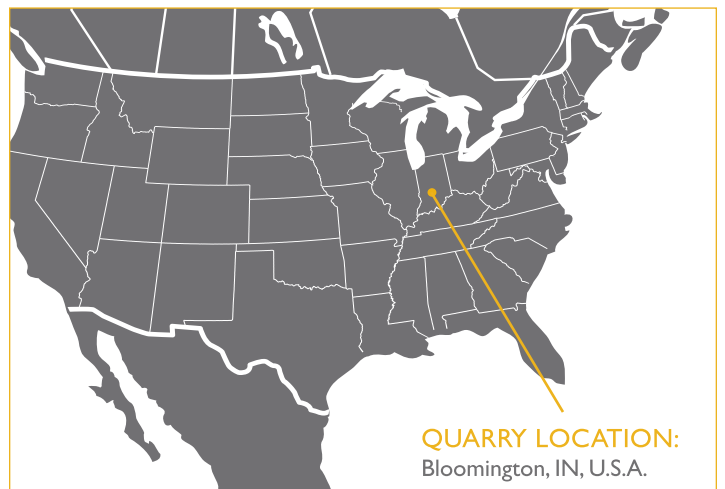

QUARRY LOCATION:
Bloomington, IN, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.
*Applied on a special order bases only and subject to availability.

LENS

● LIMESTONE



HONED


DESCRIPTION

Clean and sleek, this creamy white limestone possesses great purity and a fine, compact grain structure. The neutral, ivory-toned background exhibits occasional crystalline slivers, adding more depth to the surface. A great option for interior and exterior applications where a monochromatic aesthetic is required.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

Ancient period

900 m² and more
(31 500 cu. ft.)

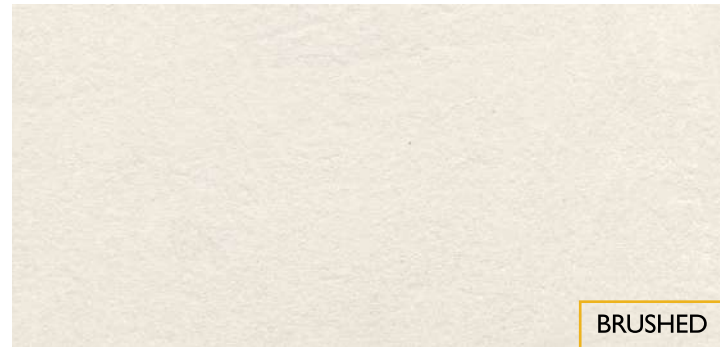

BRUSHED

FINISHES AVAILABLE

Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	15%	15%
Density	ASTM C97	143.6 lb/ft ³	2 300 kg/m ³
Compressive strength	ASTM C170	7 252 Psi	50 MPa
Modulus of rupture	ASTM C99	1 130 Psi	7.8 MPa



QUARRY LOCATION:
Moulézan, Languedoc-Roussillon, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MASSANGIS CLAIR

● LIMESTONE



HONED

DESCRIPTION

Fine, sandy grains are sprinkled against a pale, creamy background in this lighter shade of the classic Massangis French limestone. Equally suitable in both modern and traditional designs, the neutral, even tone provides a uniform appearance for any finished project.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1893

| 300 m³ and more
(45 500 cu. ft.)



BRUSHED

FINISHES AVAILABLE


Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	5.03%	5.03%
Density	ASTM C97	143 lb/ft ³	2 283 kg/m ³
Compressive strength	ASTM C170	11 244 Psi	77.5 MPa
Modulus of rupture	ASTM C99	1 037 Psi	7.15 MPa

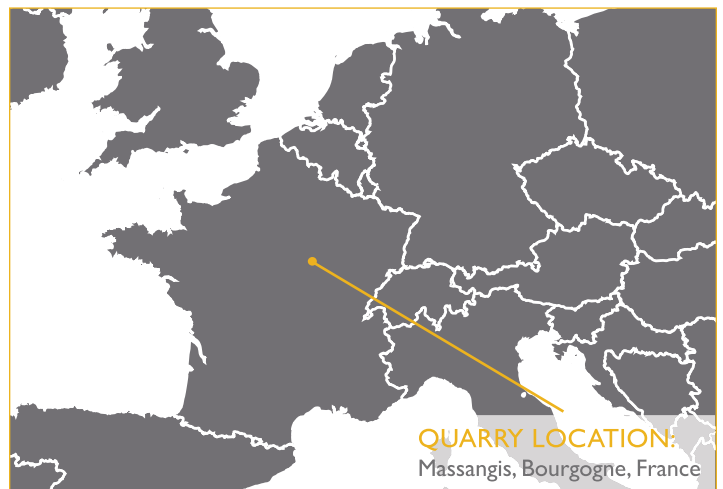

QUARRY LOCATION:
Massangis, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MASSANGIS FCB

● LIMESTONE



DESCRIPTION

Stippled shell fragments rise from a tawny background in this medium-grained limestone. The visual texture and beige earth tones produce a subtle movement and pattern for a timeless aesthetic.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1893 | 300 m³ and more
(45 500 cu. ft.)

FINISHES AVAILABLE

Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	5.03%	5.03%
Density	ASTM C97	143 lb/ft ³	2 283 kg/m ³
Compressive strength	ASTM C170	11 244 Psi	77.5 MPa
Modulus of rupture	ASTM C99	1 037 Psi	7.15 MPa



HONED

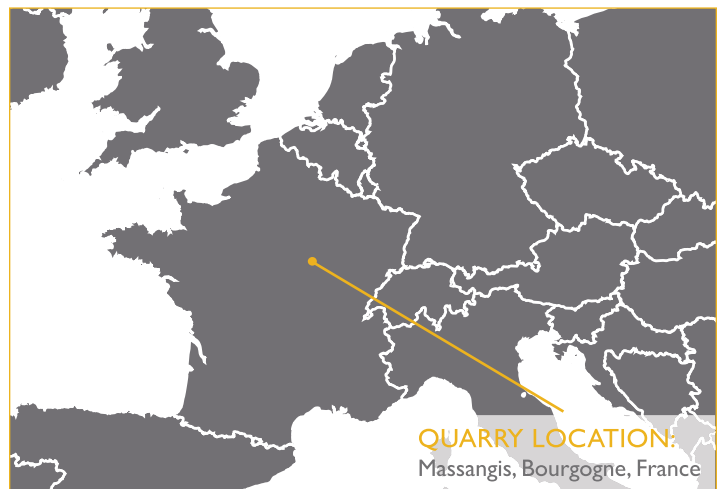

QUARRY LOCATION:
Massangis, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MASSANGIS JAUNE

● LIMESTONE



DESCRIPTION

A warm golden hue defines this variation of the classic Massangis French limestone. The yellowish ochre tone reveals occasional crystallized fossil and shell inclusions for distinct old world charm.

QUARRY OPERATING SINCE

1893

ANNUAL PRODUCTION

650 m³ and more
(22 750 cu. ft.)

FINISHES AVAILABLE

Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	3.40%	3.40%
Density	ASTM C97	146 lb/ft ³	2 344 kg/m ³
Compressive strength	ASTM C170	9 268 Psi	63.9 MPa
Modulus of rupture	ASTM C99	899 Psi	6.20 MPa



HONED

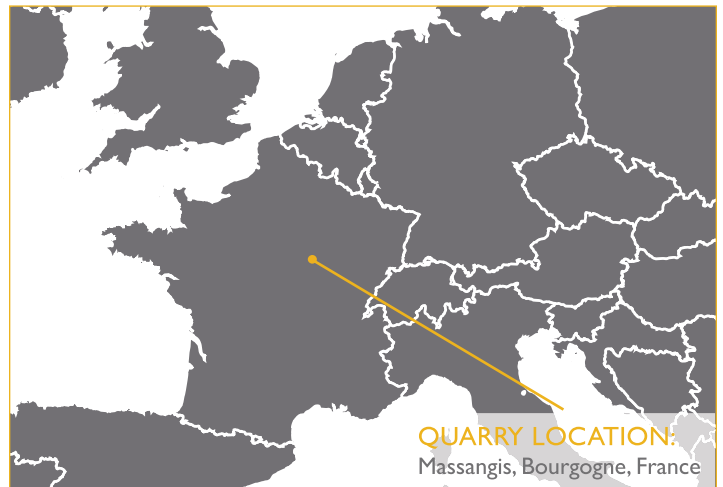

QUARRY LOCATION:
Massangis, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MASSANGIS JAUNE CLAIR

● LIMESTONE

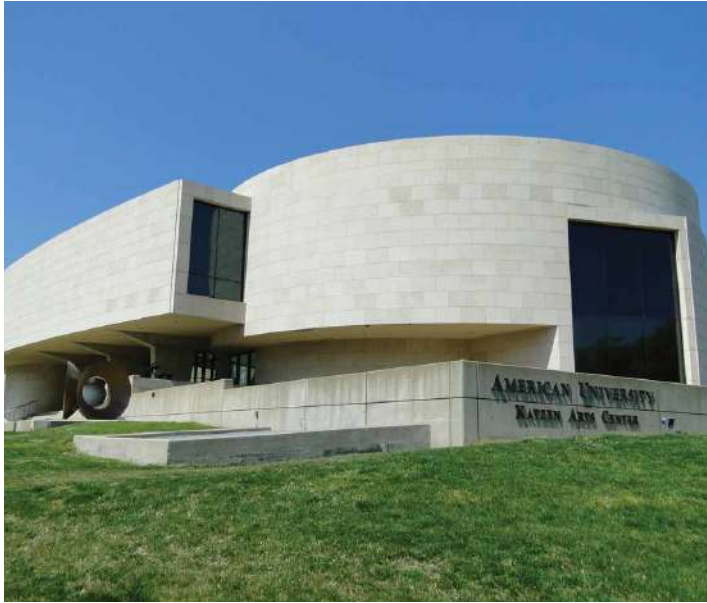

DESCRIPTION

Finely blended with a pale yellow background, this flaxen-hued limestone features a uniform grain with occasional shell inclusions. Hailing from the ancient Massangis quarry, this variety imparts a subtle warm tone to any design.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1893 | 400 m³ and more
(49 000 cu. ft.)

FINISHES AVAILABLE


Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	3.40%	3.40%
Density	ASTM C97	146 lb/ft ³	2 344 kg/m ³
Compressive strength	ASTM C170	9 268 Psi	63.9 MPa
Modulus of rupture	ASTM C99	899 Psi	6.20 MPa

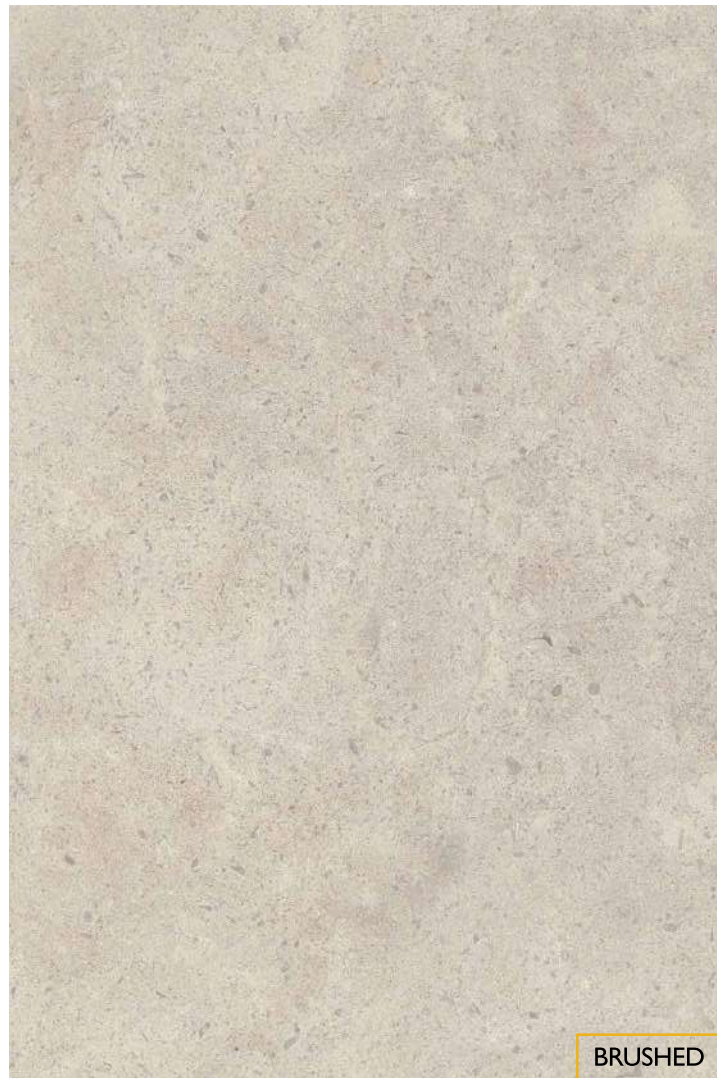

BRUSHED

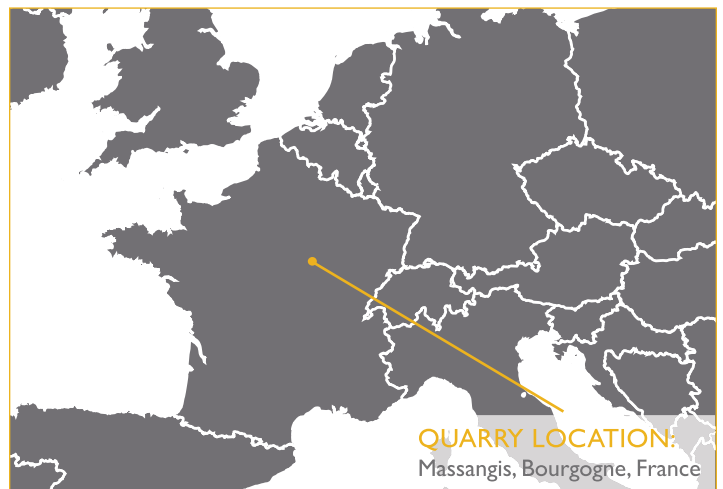

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ROCHERONS DORÉ

● LIMESTONE

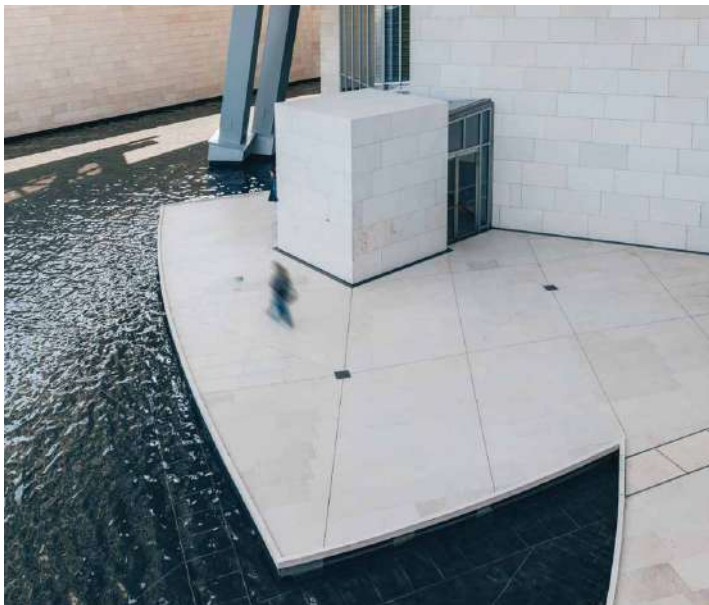

DESCRIPTION

This fine-grained limestone produces a wide range of earth tones from light beige to warm grey beige, with occasional blush tones in the background. Sandy patterns on the surface create remarkable visual texture.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1893

425 m³ and more
(14 875 cu. ft.)

FINISHES AVAILABLE


Polished Iron Blasted Tumbled
Honed Bush-Hammered Flamed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.40%	0.40%
Density	ASTM C97	165 lb/ft ³	2 643 kg/m ³
Compressive strength	ASTM C170	25 972 Psi	179 MPa
Flexural strength	ASTM C880	1 661 Psi	11.46 MPa
Modulus of rupture	ASTM C99	2 329 Psi	16.1 MPa

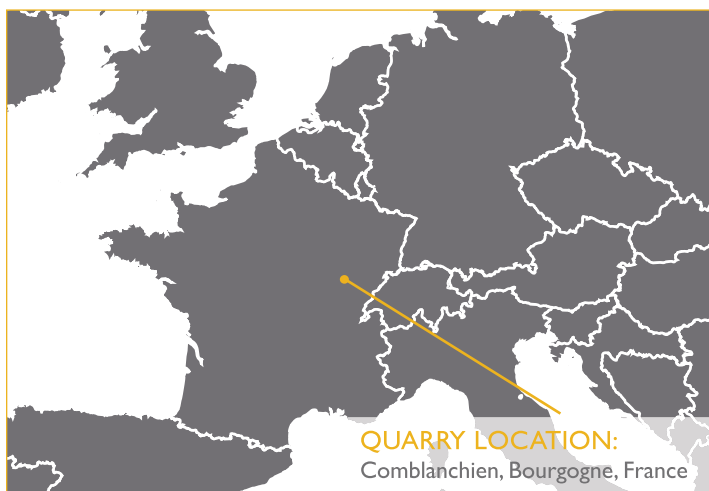

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ROCHERONS DORÉ CLAIR

● LIMESTONE



DESCRIPTION

The dense, compact grain structure of this limestone gives it a marble-like quality in its appearance. A uniform, rosy beige background provides a neutral base for occasional small shell inclusions. A resilient and versatile choice for any interior or exterior application.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1893

700 m³ and more
(24 500 cu. ft.)

FINISHES AVAILABLE


Polished	Iron Blasted	Tumbled
Honed	Bush-Hammered	Flamed

APPLICATIONS


Exterior	Vertical
Interior	Commercial
Horizontal	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.40%	0.40%
Density	ASTM C97	166.87 lb/ft ³	2 673.1 kg/m ³
Compressive strength	ASTM C170	24 275 Psi	1 67.37 MPa
Modulus of rupture	ASTM C99	2 310 Psi	15.92 MPa

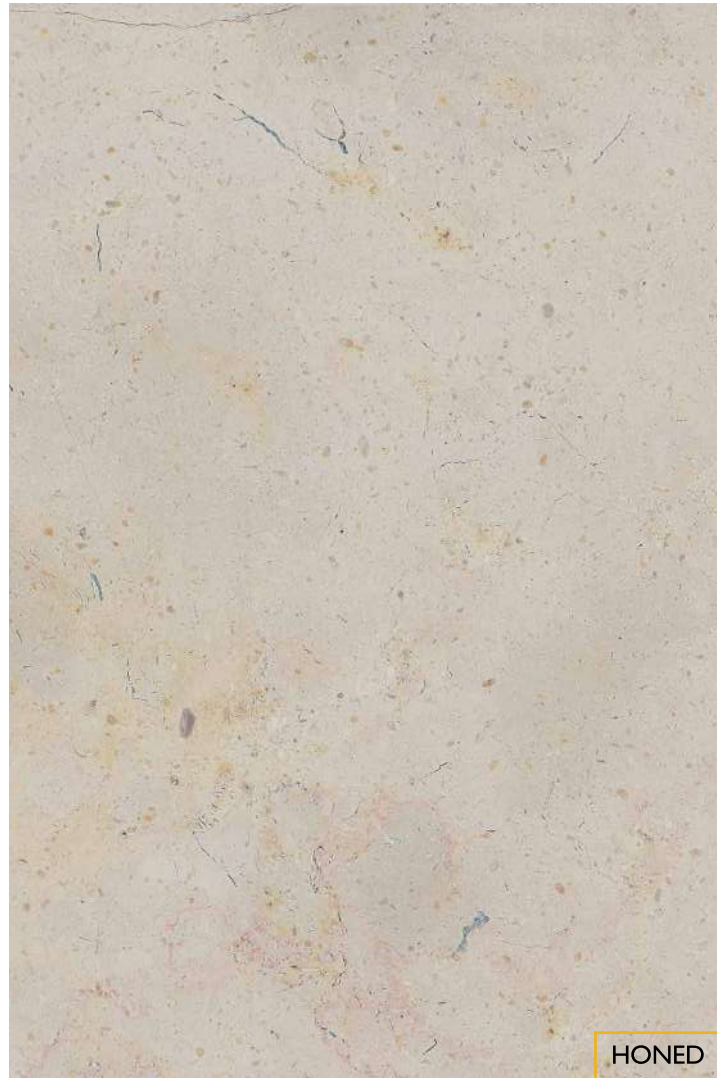

HONED

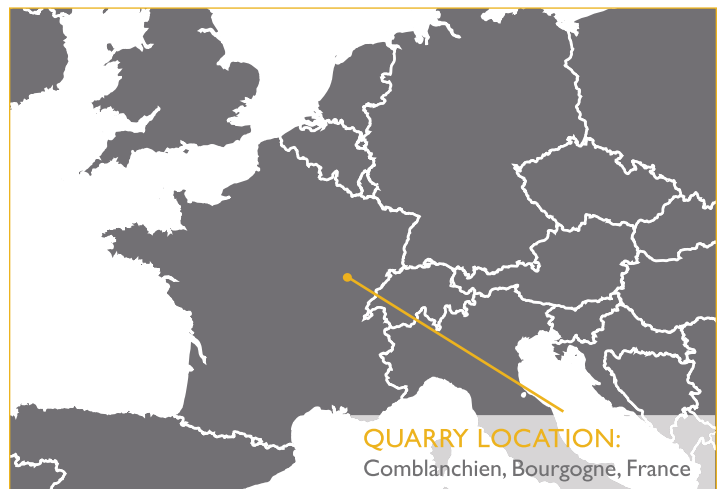

QUARRY LOCATION:
Comblanchien, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ROCHERONS MOUCHETÉ

● LIMESTONE



COMING SOON

DESCRIPTION

This very fine grained limestone possesses a homogenous structure that gives it the appearance of a marble. This variety of the classic Rocherons French limestone has more pronounced shell and fossil inclusions, lending greater visual texture that offers many design possibilities and applications.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION
1893 | On demand

FINISHES AVAILABLE


Polished Iron Blasted Tumbled
Honed Bush-Hammered Flamed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.40%	0.40%
Density	ASTM C97	166.87 lb/ft ³	2 673.1 kg/m ³
Compressive strength	ASTM C170	24 275 Psi	167.37 MPa
Flexural strength	ASTM C880	1 661 Psi	11.46 MPa
Modulus of rupture	ASTM C99	2 310 Psi	15.92 MPa

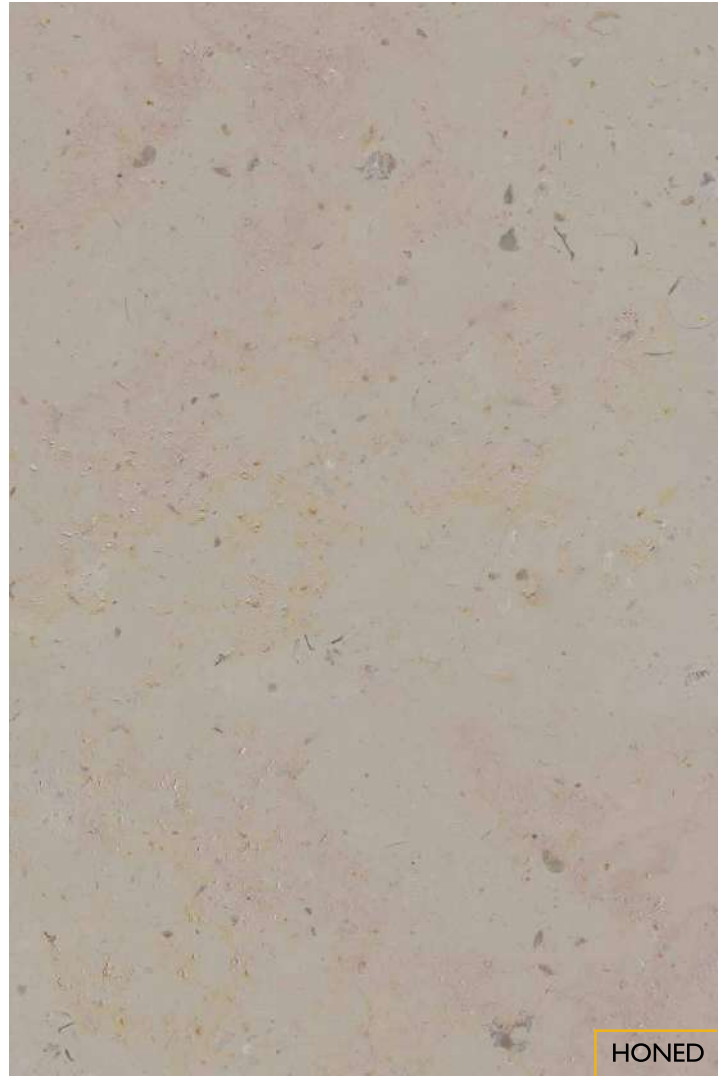

HONED

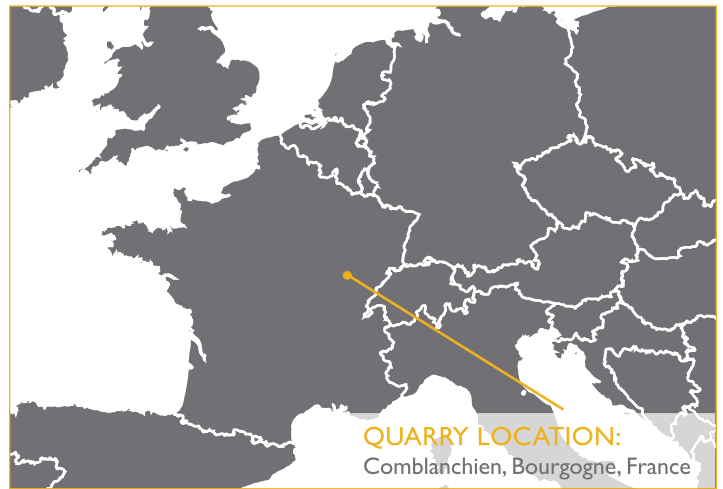

QUARRY LOCATION:
Comblanchien, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ROCHERONS RAMAGÉ

● LIMESTONE



COMING SOON

DESCRIPTION

This dense and fine grained limestone looks and acts like a marble. The large shell and fossil inclusions create a unique pattern like islands floating against a sea of beige.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

| 1893

| On demand

FINISHES AVAILABLE

Polished Iron Blasted Tumbled
Honed Bush-Hammered Flamed

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.40%	0.40%
Density	ASTM C97	166.87 lb/ft ³	2.673.1 kg/m ³
Compressive strength	ASTM C170	24 275 Psi	167.37 MPa
Modulus of rupture	ASTM C99	2 310 Psi	15.92 MPa



HONED

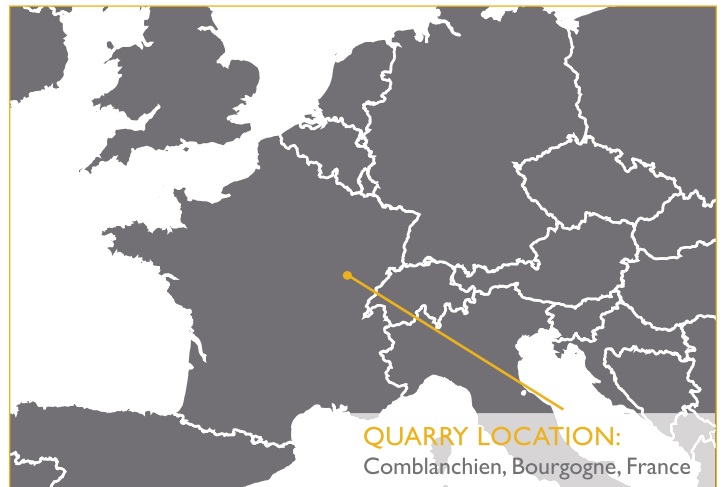

QUARRY LOCATION:
Comblanchien, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT CLAIR - FLEURI

● LIMESTONE



POLISHED

DESCRIPTION

This gray-beige American limestone is treated as a marble, and can therefore be used in architectural and heritage projects as well as for countertops.

Because its wavy grain pattern evolves from one slab to another, every countertop is unique. In a fleuri-cut pattern, it creates beautiful white to gray-beige waves.

QUARRY OPERATING SINCE

1900

ANNUAL PRODUCTION

On demand

FINISHES AVAILABLE

Polished Waterjet
Antique Sandblasted
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.5%	0.5%
Density	ASTM C97	168 lb/ft ³	2 691.10 kg/m ³
Compressive strength	ASTM C170	15 889 Psi	109.55 MPa
Flexural strength	ASTM C880	1 805 Psi	12.4 MPa
Modulus of rupture	ASTM C99	972 Psi	6.70 MPa



SANDBLASTED



ANTIQUE

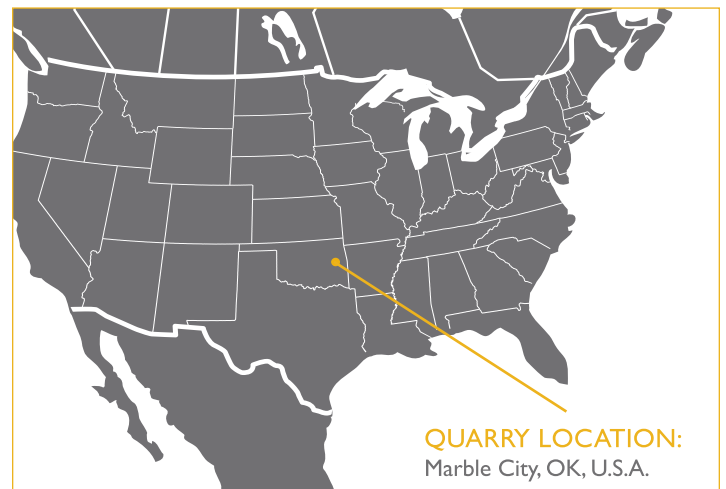

QUARRY LOCATION:
Marble City, OK, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT CLAIR - LINEAR

● LIMESTONE



DESCRIPTION

This gray-beige American limestone is treated as a marble, making it suitable for architectural and heritage projects, as well as for countertops. Because its wavy grain pattern evolves from one slab to another, every countertop is unique. It shows a more consistent grain pattern in a linear cut.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1900

On demand

FINISHES AVAILABLE


Polished Waterjet
Antique Sandblasted
Honed

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.5%	0.5%
Density	ASTM C97	168 lb/ft ³	2 691.10 kg/m ³
Compressive strength	ASTM C170	15 889 Psi	109.55 MPa
Flexural strength	ASTM C880	1 805 Psi	12.4 MPa
Modulus of rupture	ASTM C99	972 Psi	6.70 MPa

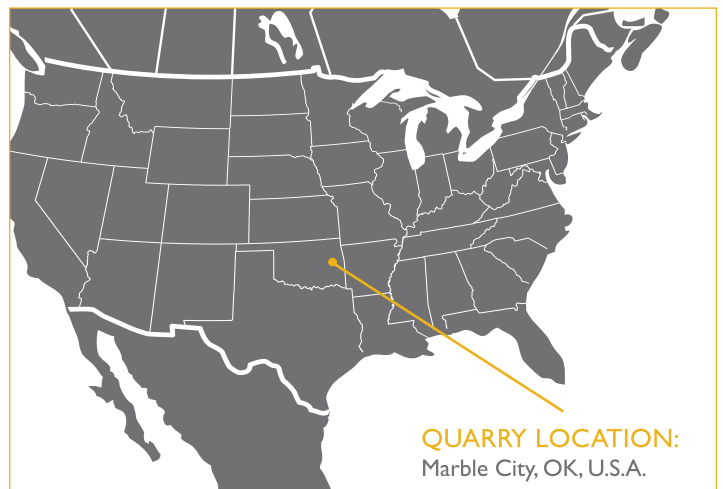

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT PIERRE - FLEURI

● LIMESTONE



DESCRIPTION

In a fleuri-cut pattern, this rich chocolate brown limestone creates a warm, homogenous surface. Recommended for small indoor applications, Saint Pierre evolves from one block to another, making almost every slab unique.

It can also be cut in a linear pattern to expose its distinctive veins.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

2007

| 500 m³ and more
(53 000 cu. ft.)

FINISHES AVAILABLE


Antique
Honed
Sandblasted

APPLICATIONS

Interior Commercial
Horizontal Residential
Vertical

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.14%	0.14%
Density	ASTM C97	169.11lb/ft ³	2 708.72 kg/m ³
Compressive strength	ASTM C170	17 343 Psi	119.58 MPa
Flexural strength	ASTM C880	1 882 Psi	13.0 MPa
Modulus of rupture	ASTM C99	1 155 Psi	7.96 MPa

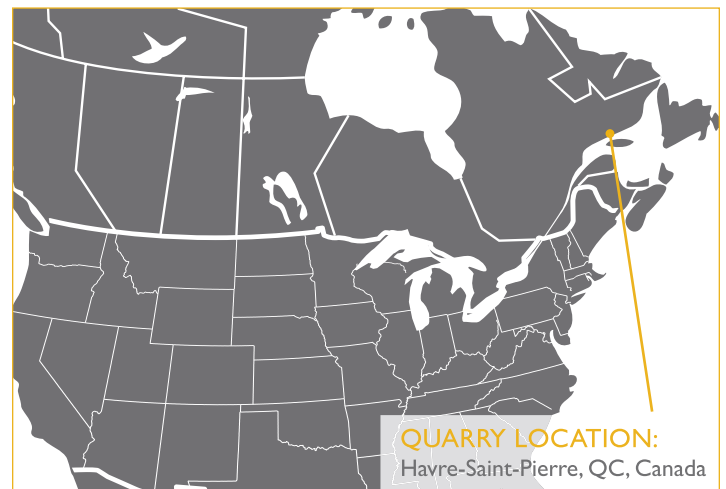

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SAINT PIERRE - LINEAR

● LIMESTONE



HONED

DESCRIPTION

The horizontal veins in this rich chocolate brown limestone make a striking design statement. Recommended for indoor applications, Saint Pierre evolves from one block to another, making almost every slab unique. For a more refined, consistent pattern, choose fleuri cut.

QUARRY OPERATING SINCE

2007

ANNUAL PRODUCTION

1 500 m³ and more
(53 000 cu. ft.)

FINISHES AVAILABLE

Antique
Honed


APPLICATIONS

Interior
Horizontal
Vertical

Commercial
Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.14%	0.14%
Density	ASTM C97	169.11lb/ft ³	2 708.72 kg/m ³
Compressive strength	ASTM C170	17 343 Psi	119.58 MPa
Flexural strength	ASTM C880	1 882 Psi	13.0 MPa
Modulus of rupture	ASTM C99	1 155 Psi	7.96 MPa

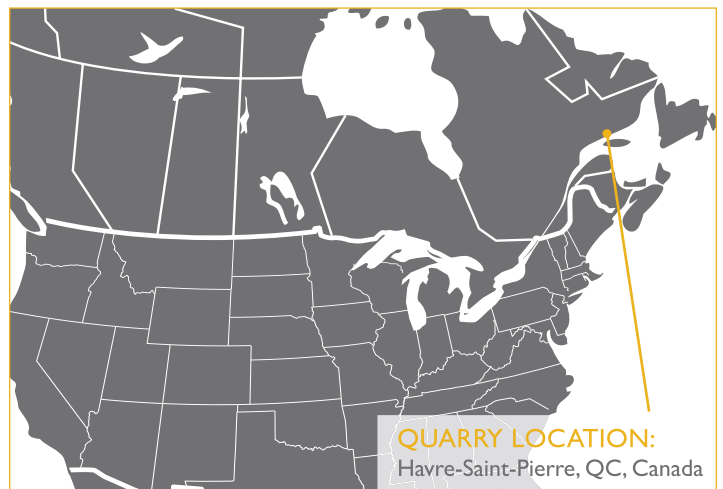

QUARRY LOCATION:
Havre-Saint-Pierre, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

VALANGES

● LIMESTONE



DESCRIPTION

This uniform buff-toned limestone offers a clean, contemporary aesthetic. Light veins and occasional shell inclusions weave throughout the surface in a subtle movement that adds visual interest to any design project.

QUARRY OPERATING SINCE

1893

ANNUAL PRODUCTION

2 250 m³ and more
(78 750 cu. ft.)

FINISHES AVAILABLE


Brushed Iron Blasted Tumbled
Honed Bush-Hammered

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	4.58%	4.58%
Density	ASTM C97	147 lb/ft ³	2 359 kg/m ³
Compressive strength	ASTM C170	10 594 Psi	73.0 MPa
Modulus of rupture	ASTM C99	1 095 Psi	7.55 MPa

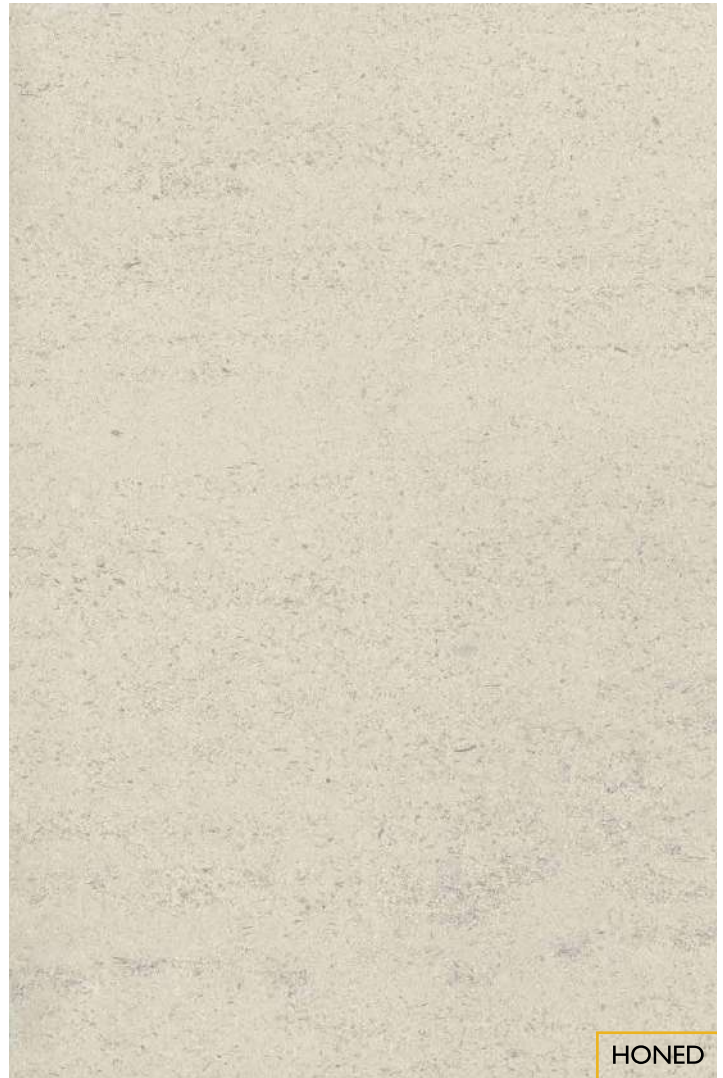

HONED

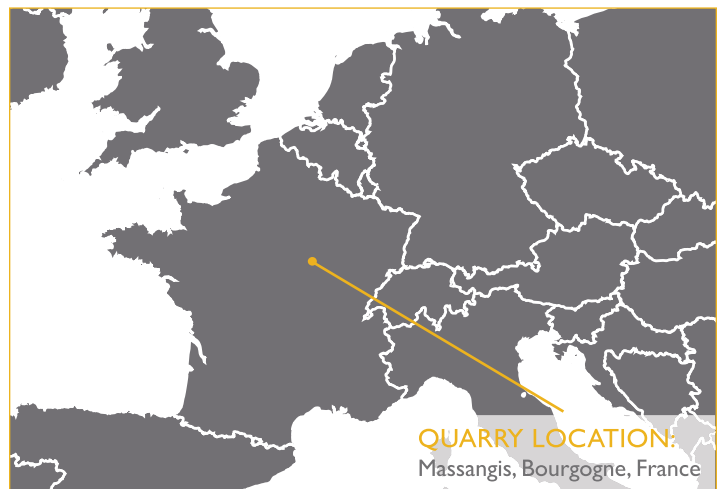

QUARRY LOCATION:
Massangis, Bourgogne, France

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

WALLACE CREEK

● LIMESTONE



DESCRIPTION

Taken from the same quarry as Missisquoi marble, this black limestone is a Polycor exclusive and represents the very best high-end product.

Gorgeously veined, it is treated as a marble and is recommended for indoor applications.

QUARRY OPERATING SINCE 2009 | **ANNUAL PRODUCTION** 1 500 m³ and more (53 000 cu. ft.)

FINISHES AVAILABLE

Honed

APPLICATIONS

Interior Commercial
Horizontal Residential
Vertical

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.04%	0.04%
Density	ASTM C97	169.3 lb/ft ³	2 711.93 kg/m ³
Compressive strength	ASTM C170	21 014 Psi	144.89 MPa
Flexural strength	ASTM C880	3 738.3 Psi	25.8 MPa
Modulus of rupture	ASTM C99	14 531 Psi	100.19 MPa



HONED



QUARRY LOCATION:
Saint-Armand, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR


CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MARBLE

CASCAPEDIA

MARBLE

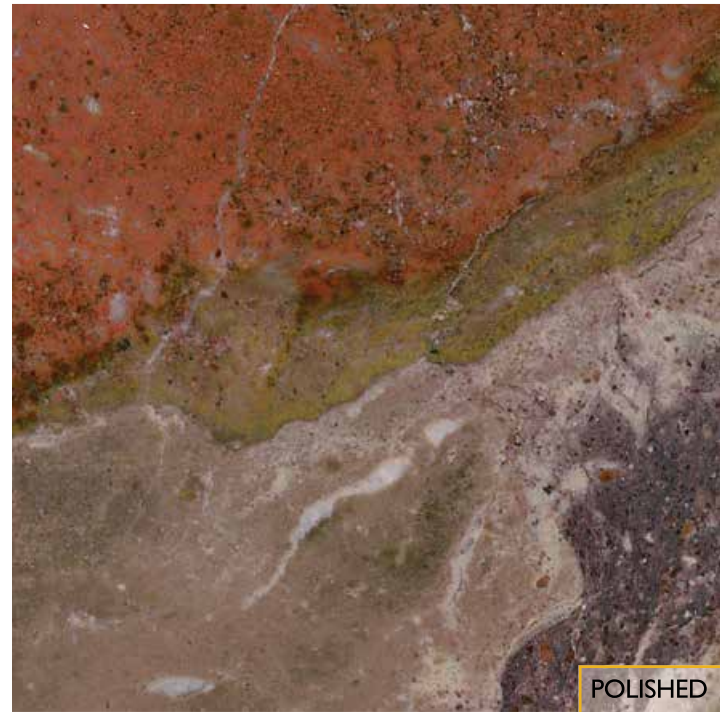

DESCRIPTION

Strikingly rich in colors that can only come from the harsh Canadian climate, the Cascapedia stone is a breccia-type marble that can be found in the castles and aristocratic residences of Europe. Pure sophistication!

QUARRY OPERATING SINCE


2004

ANNUAL PRODUCTION

1 800 m³ and more
(65 000 cu. ft.)

FINISHES AVAILABLE

Polished
Antique
Sandblasted

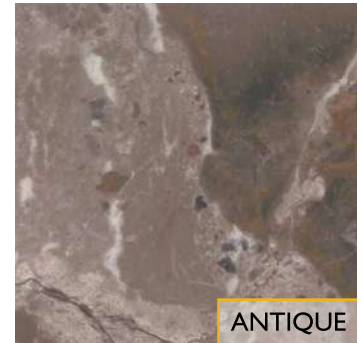


APPLICATIONS

Interior	Commercial
Horizontal	Residential
Vertical	Memorials

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.29%	0.29%
Density	ASTM C97	167.2 lb/ft ³	2 678.29 kg/m ³
Compressive strength	ASTM C170	18 579 Psi	128.10 MPa
Flexural strength	ASTM C880	1 116.8 Psi	7.7 MPa
Modulus of rupture	ASTM C99	1 117 Psi	7.70 MPa

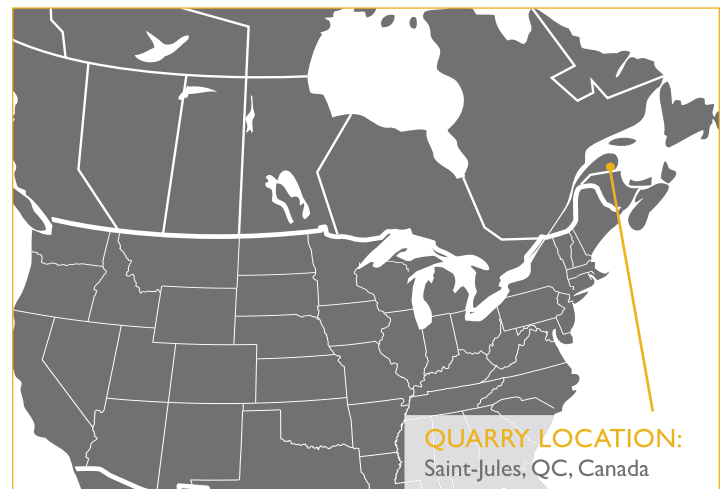

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

ETOWAH

MARBLE



POLISHED

DESCRIPTION

The huge quarry for this exclusive Polycor marble extends from Tate to Marble Hill, Georgia.

This is why it was widely used in historical American architecture.

QUARRY OPERATING SINCE

1900

ANNUAL PRODUCTION

500 m³ and more
(18 000 cu. ft.)

FINISHES AVAILABLE

Polished Honed
Antique Sandblasted

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.07%	0.07%
Density	ASTM C97	170.4 lb/ft ³	2 729.55 kg/m ³
Compressive strength	ASTM C170	10 852 Psi	74.82 MPa
Flexural strength	ASTM C880	1 644 Psi	11.34 MPa
Modulus of rupture	ASTM C99	1 589 Psi	10.96 MPa



SANDBLASTED



ANTIQUE

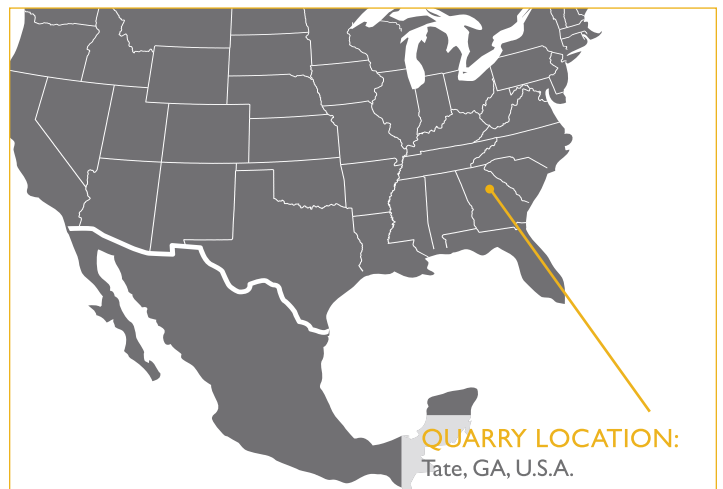

QUARRY LOCATION:
Tate, GA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

MISSISQUOI

MARBLE



DESCRIPTION

Missisquoi is produced in small quantities and is often viewed as a heritage stone. It is usually used in historical building restorations.

A dense and compact marble found only in this region of Quebec, it offers a wide range of colors and is primarily used for indoor applications.

QUARRY OPERATING SINCE | **ANNUAL PRODUCTION**
1905 | 1 200 m³ and more
(42 000 cu. ft.)

FINISHES AVAILABLE

Polished
Antique
Sandblasted

APPLICATIONS

Exterior | Vertical
Interior | Commercial
Horizontal | Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.073%	0.073%
Density	ASTM C97	169 lb/ft ³	2 707.12 kg/m ³
Compressive strength	ASTM C170	15 289 Psi	105.41 MPa
Flexural strength	ASTM C880	1 218.3 Psi	8.4 MPa
Modulus of rupture	ASTM C99	1 305 Psi	9.00 MPa



POLISHED



SANDBLASTED



ANTIQUE



QUARRY LOCATION:
Saint-Armand, QC, Canada

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

PEARL GREY

MARBLE

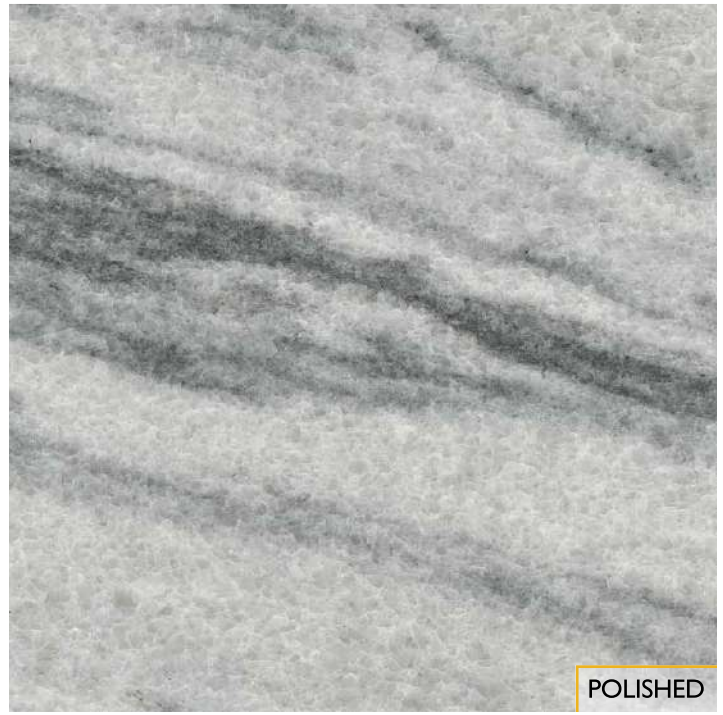

POLISHED

DESCRIPTION

The thin, closely-packed and homogenous grain structure of this North American marble gives superior strength and resistance, which explains why it has been used for more than a century in indoor and outdoor architectural projects. Its white, gray and black veins create interesting movement. Pearl Grey comes from the same quarry as White Cherokee™.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

1 000 m³ and more
(35 000 cu. ft.)

FINISHES AVAILABLE

Antique Polished
Honed Sandblasted

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	9 505 Psi	65.53 MPa
Flexural strength	ASTM C880	1 192 Psi	8.22 MPa
Modulus of rupture	ASTM C99	1 374 Psi	9.47 MPa



SANDBLASTED

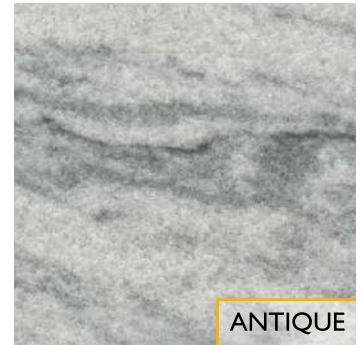

ANTIQUE

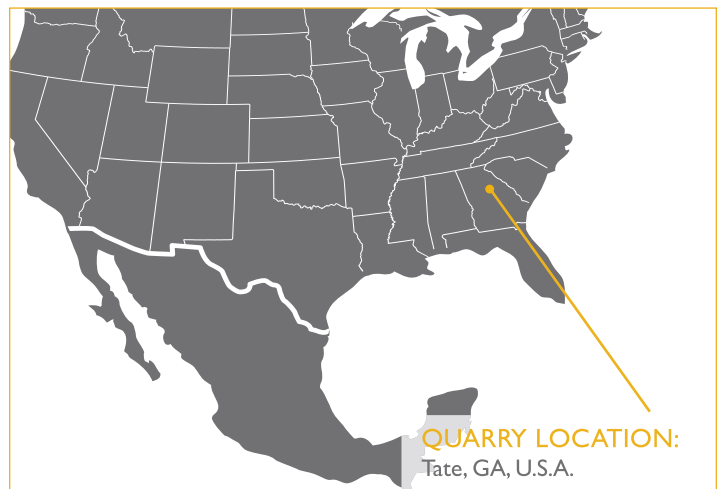

QUARRY LOCATION:
Tate, GA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS




POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SOLAR GREY

MARBLE

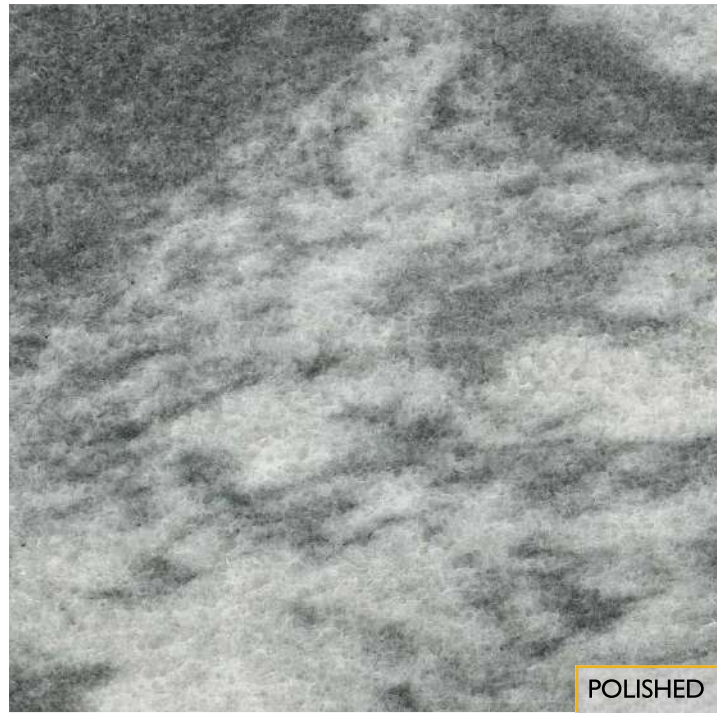

POLISHED

DESCRIPTION

This homogenous and closely-packed marble features a variable gray and black vein distribution. It has excellent durability in indoor and outdoor architectural applications.

Solar Grey comes from the same quarry as White Cherokee™.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1884

300 m³ and more
(10 000 cu. ft.)

FINISHES AVAILABLE

Polished Honed
Antique Sandblasted

APPLICATIONS


Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	9 505 Psi	65.53 MPa
Flexural strength	ASTM C880	1 192 Psi	8.22 MPa
Modulus of rupture	ASTM C99	1 374 Psi	9.47 MPa



SANDBLASTED

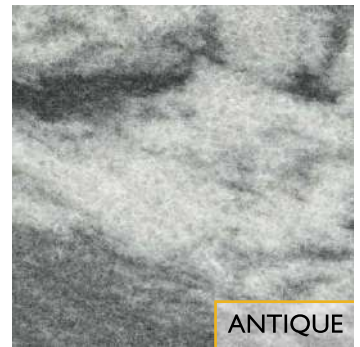

ANTIQUE

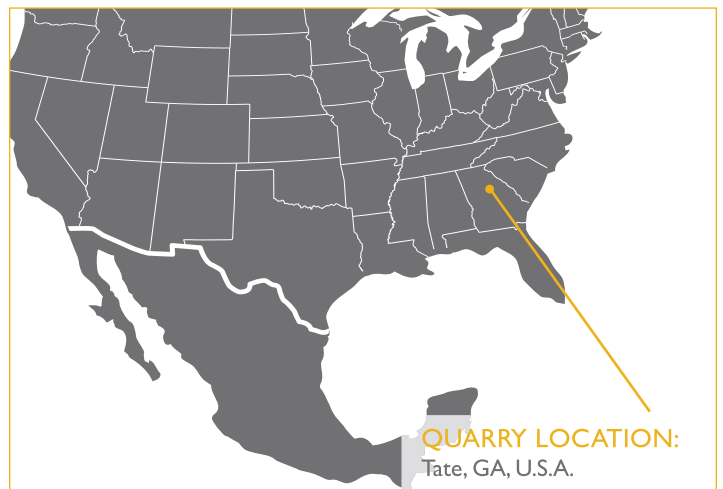

QUARRY LOCATION:
Tate, GA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

WHITE CHEROKEE™

● MARBLE



POLISHED

DESCRIPTION

This marble comes from an extensive quarry that has been operated for more than a century. Stylish White Cherokee™ is one of the most homogenous marbles, and is used in large architectural projects and American heritage building restorations. It's also an excellent choice for countertops.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

5 500 m³ and more
(250 000 cu. ft.)

SANDBLASTED



ANTIQUÉ

FINISHES AVAILABLE


Polished Honed
Antique Sandblasted

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	9 336 Psi	64.37 MPa
Flexural strength	ASTM C880	1 296 Psi	8.94 MPa
Modulus of rupture	ASTM C99	1 365 Psi	9.41 MPa

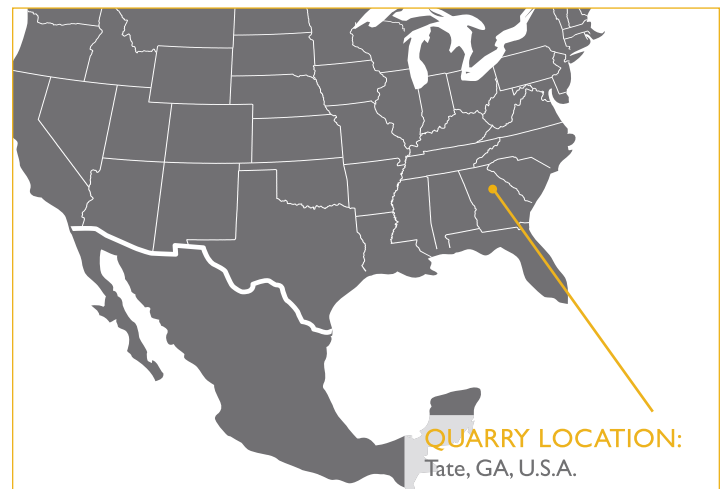

QUARRY LOCATION:
Tate, GA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

WHITE GEORGIA

MARBLE



POLISHED

DESCRIPTION

Renowned for many generations, this classic marble has gone into the building of historical American landmarks. It comes from the hills of Georgia and is brilliant white.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1884

500 m³ and more
(20 000 cu. ft.)

FINISHES AVAILABLE

Polished Honed
Antique Sandblasted

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.08%	0.08%
Density	ASTM C97	170.4 lb/ft ³	2 729.55 kg/m ³
Compressive strength	ASTM C170	9 883 Psi	68.14 MPa
Flexural strength	ASTM C880	1 505 Psi	10.38 MPa
Modulus of rupture	ASTM C99	1 467 Psi	10.11 MPa



SANDBLASTED



ANTIQUE

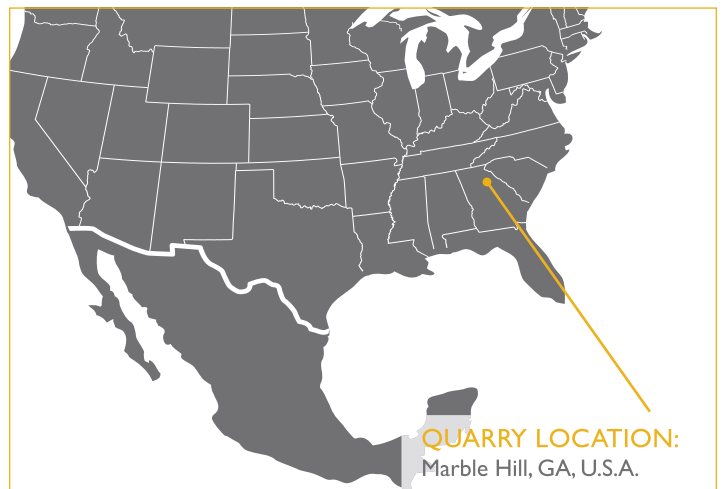

QUARRY LOCATION:
Marble Hill, GA, U.S.A.

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.

SOAPSTONE

ALBERENE SOAPSTONE

SOAPSTONE



DESCRIPTION

The unique rustic look and industrial style of Alberene Soapstone have made it a designer choice since 1883. Its unusual thermal properties and closely-packed structure make it perfect for large spaces and heated flooring.

This stone is heat and acid resistant. It's as tough as it gets!

QUARRY OPERATING SINCE 1883 | **ANNUAL PRODUCTION** 2 500 m³ and more (90 000 cu. ft.)

FINISHES AVAILABLE



Honed
Antique

APPLICATIONS

Exterior Vertical
Interior Commercial
Horizontal Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.11%	0.11%
Density	ASTM C97	179.7 lb/ft ³	2 878.52 kg/m ³
Compressive strength	ASTM C170	4 180 Psi	28.82 MPa
Modulus of rupture	ASTM C99	1 490 Psi	10.27 MPa

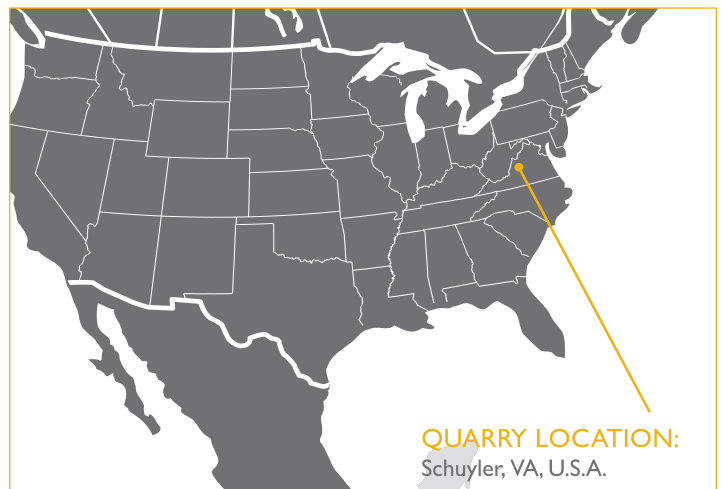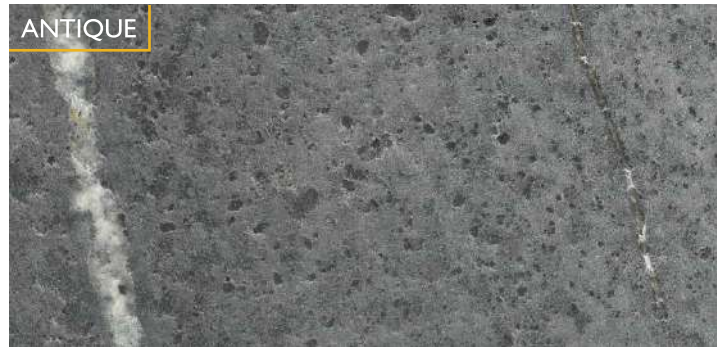

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS



POLYCOR

CONTACT US info@polycor.com | 418 692-4695

Computer generated images and printed reproductions may not accurately match natural stone colors.